

Wireless and Mobile Networks

Chapter 6: Wireless and Mobile Networks

Background:

wireless (mobile) phone subscribers now exceeds # wired phone subscribers!

computer nets: laptops, palmtops, PDAs,
Internet-enabled phone promise anytime
untethered Internet access

two important (but different) challenges

wireless: communication over wireless link

mobility: handling the mobile user who changes point of attachment to network

Chapter 6 outline

6.1 Introduction

Wireless

6.2 Wireless links,
characteristics

CDMA

6.3 IEEE 802.11
wireless LANs ("wi-fi")

6.4 Cellular Internet
Access

architecture

standards (e.g., GSM)

Mobility

6.5 Principles:
addressing and routing
to mobile users


6.6 Mobile IP

6.7 Handling mobility in
cellular networks


6.8 Mobility and higher-
layer protocols

6.9 Summary


Elements of a wireless network

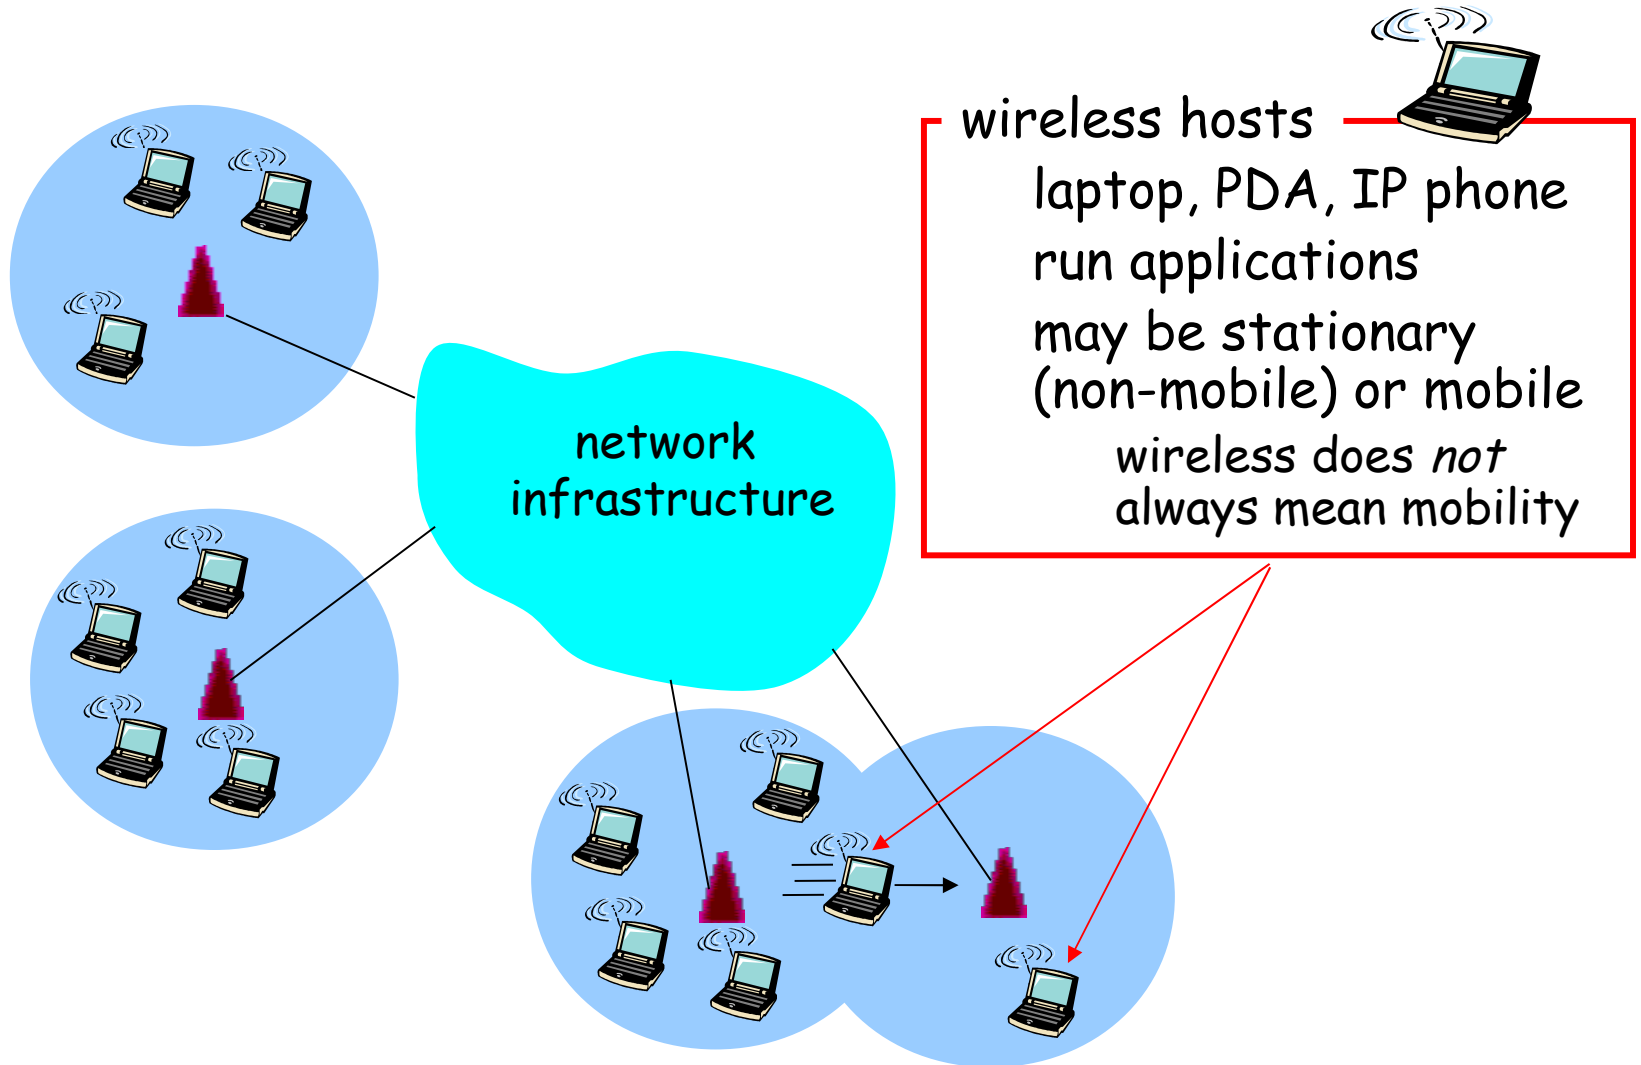


Elements of a wireless network

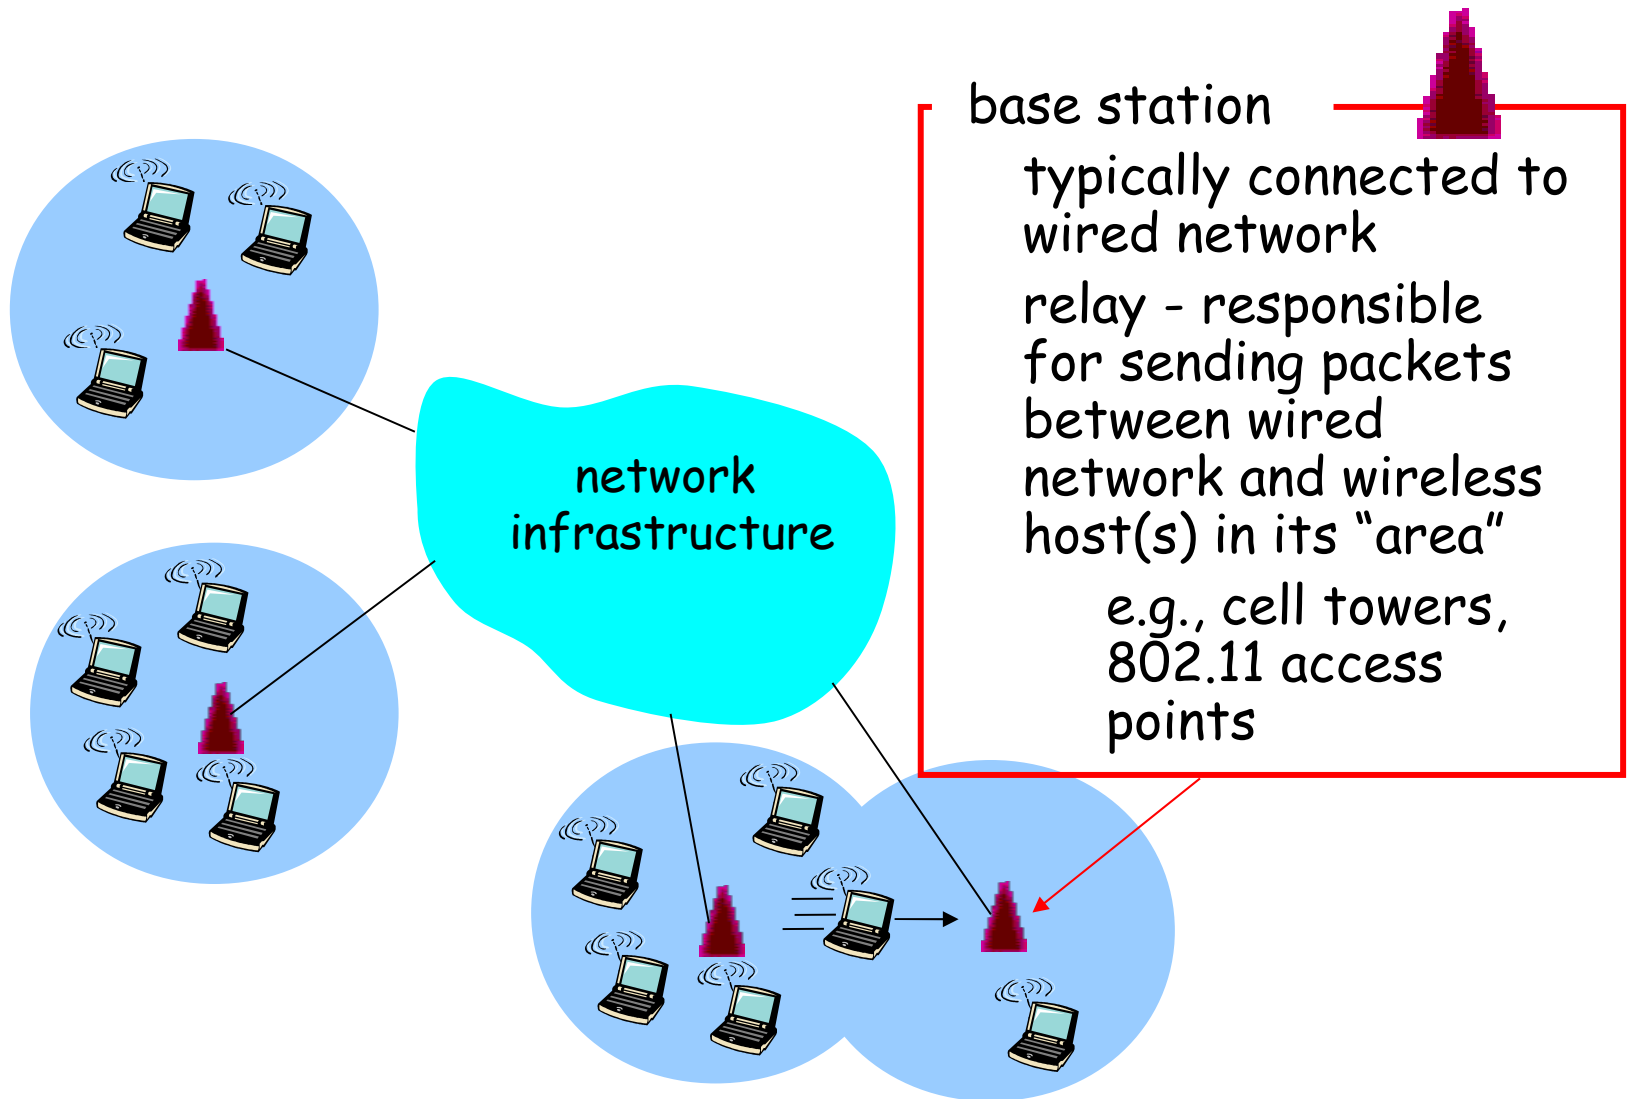


Elements of a wireless network

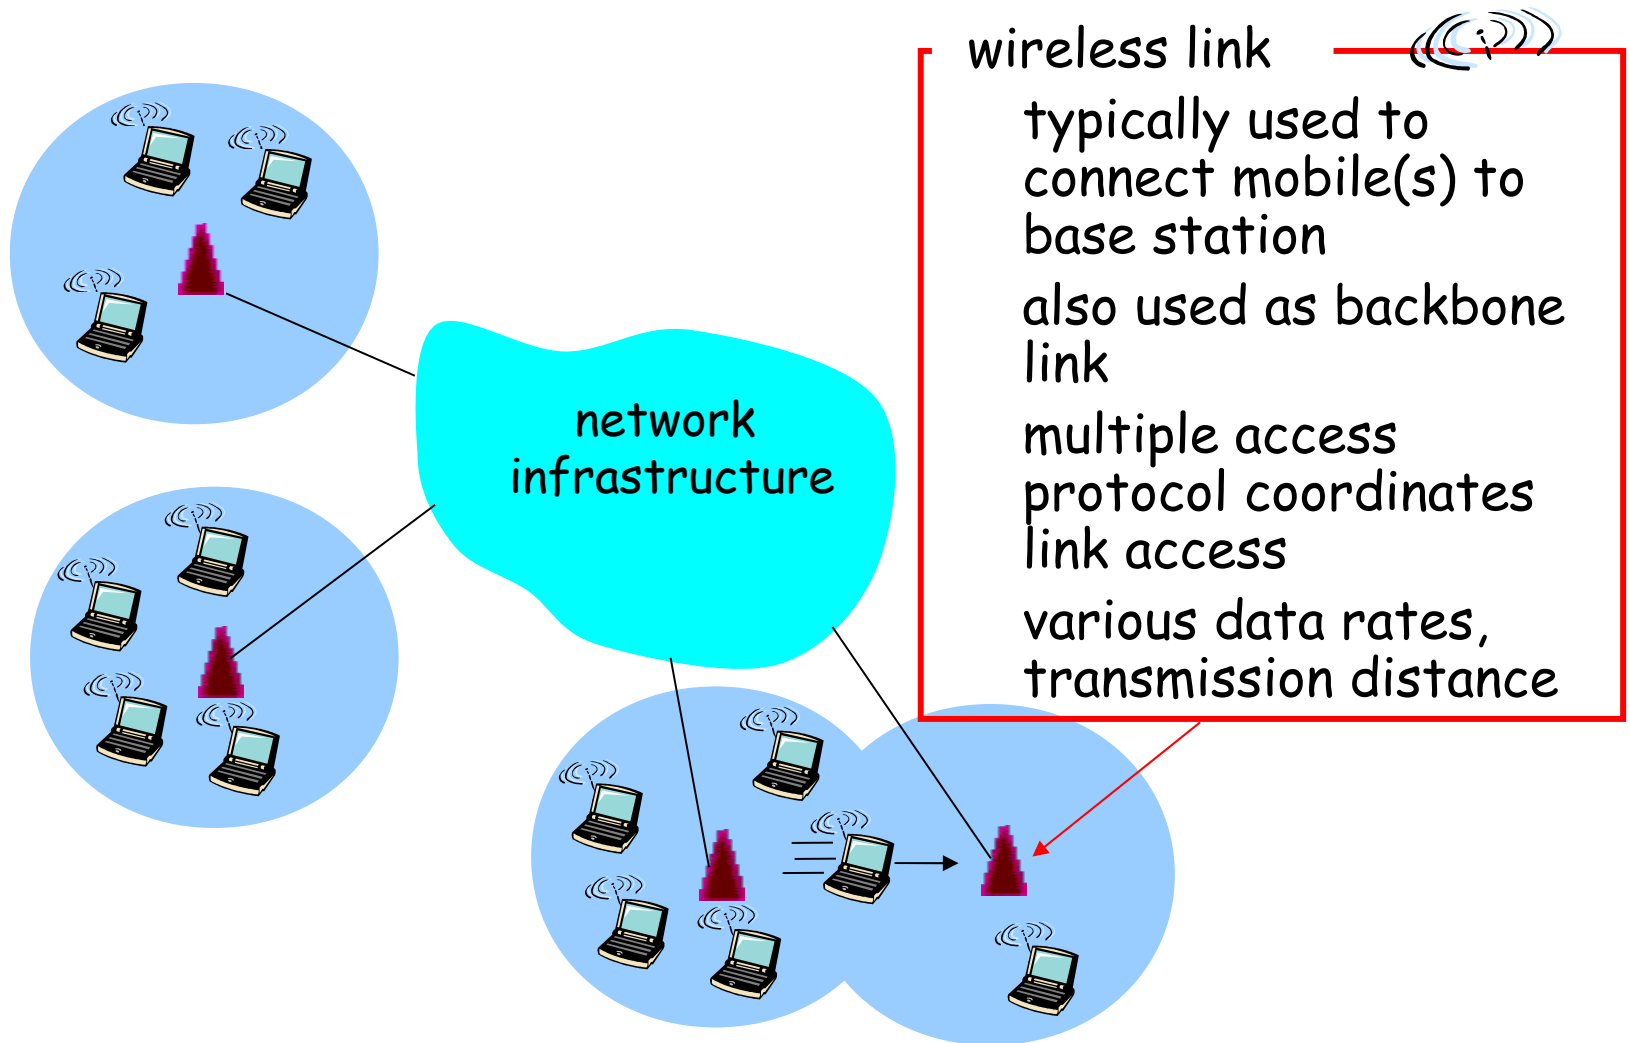


Characteristics of selected wireless link standards

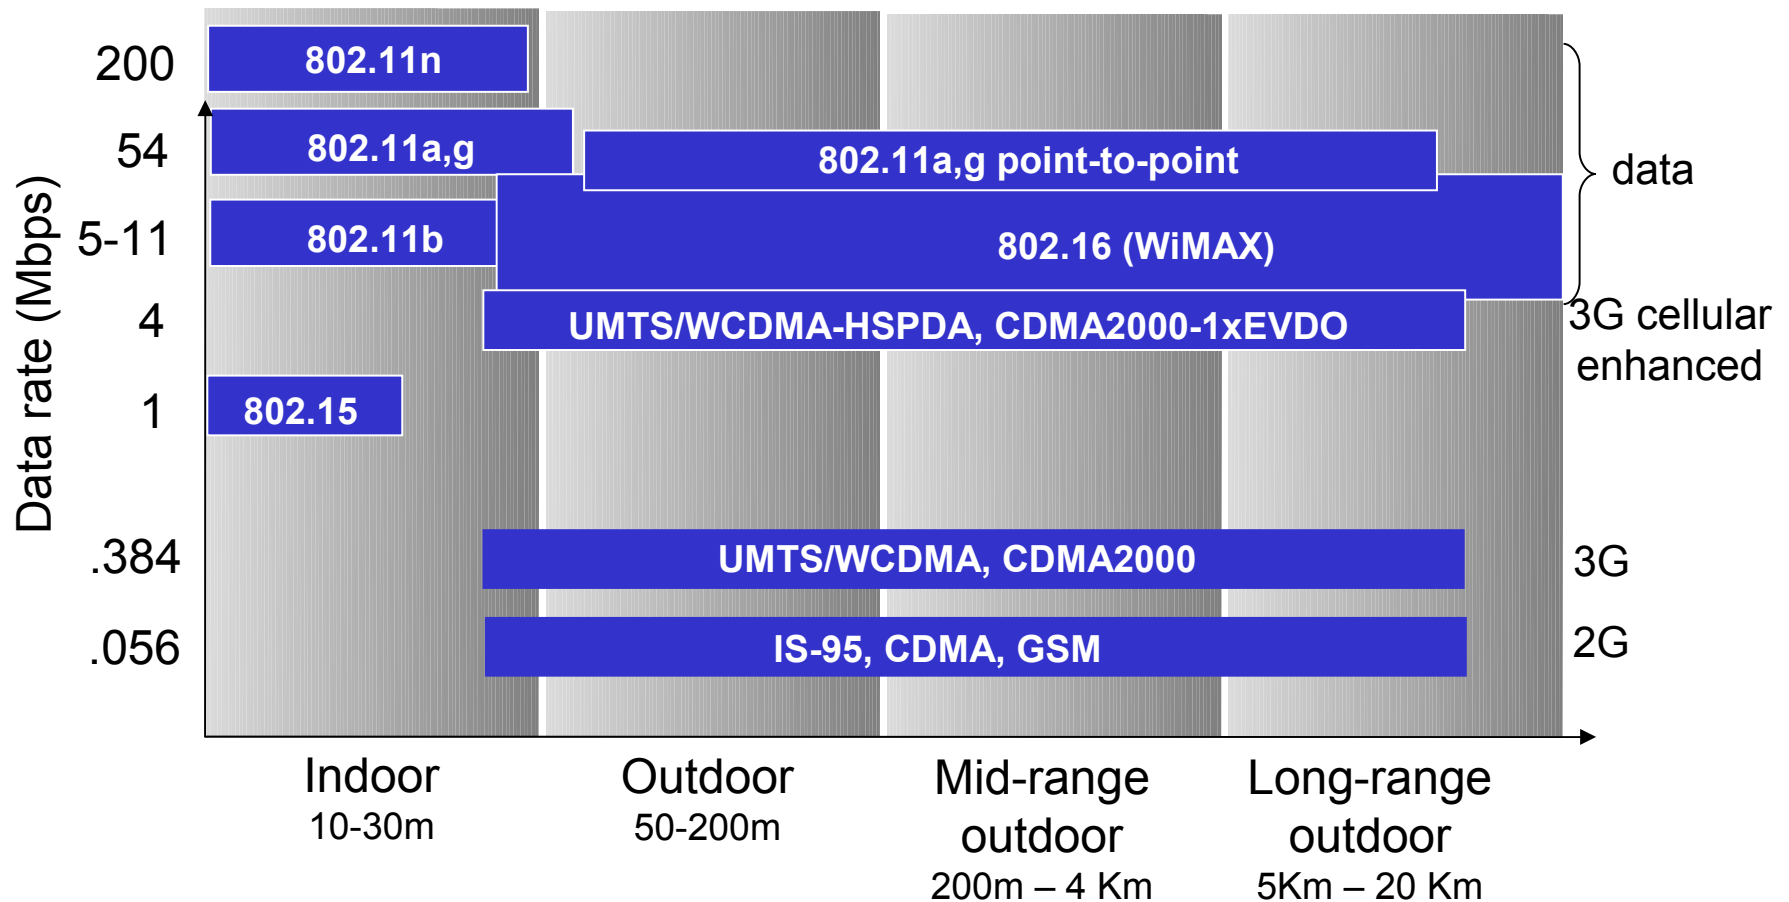

Elements of a wireless network

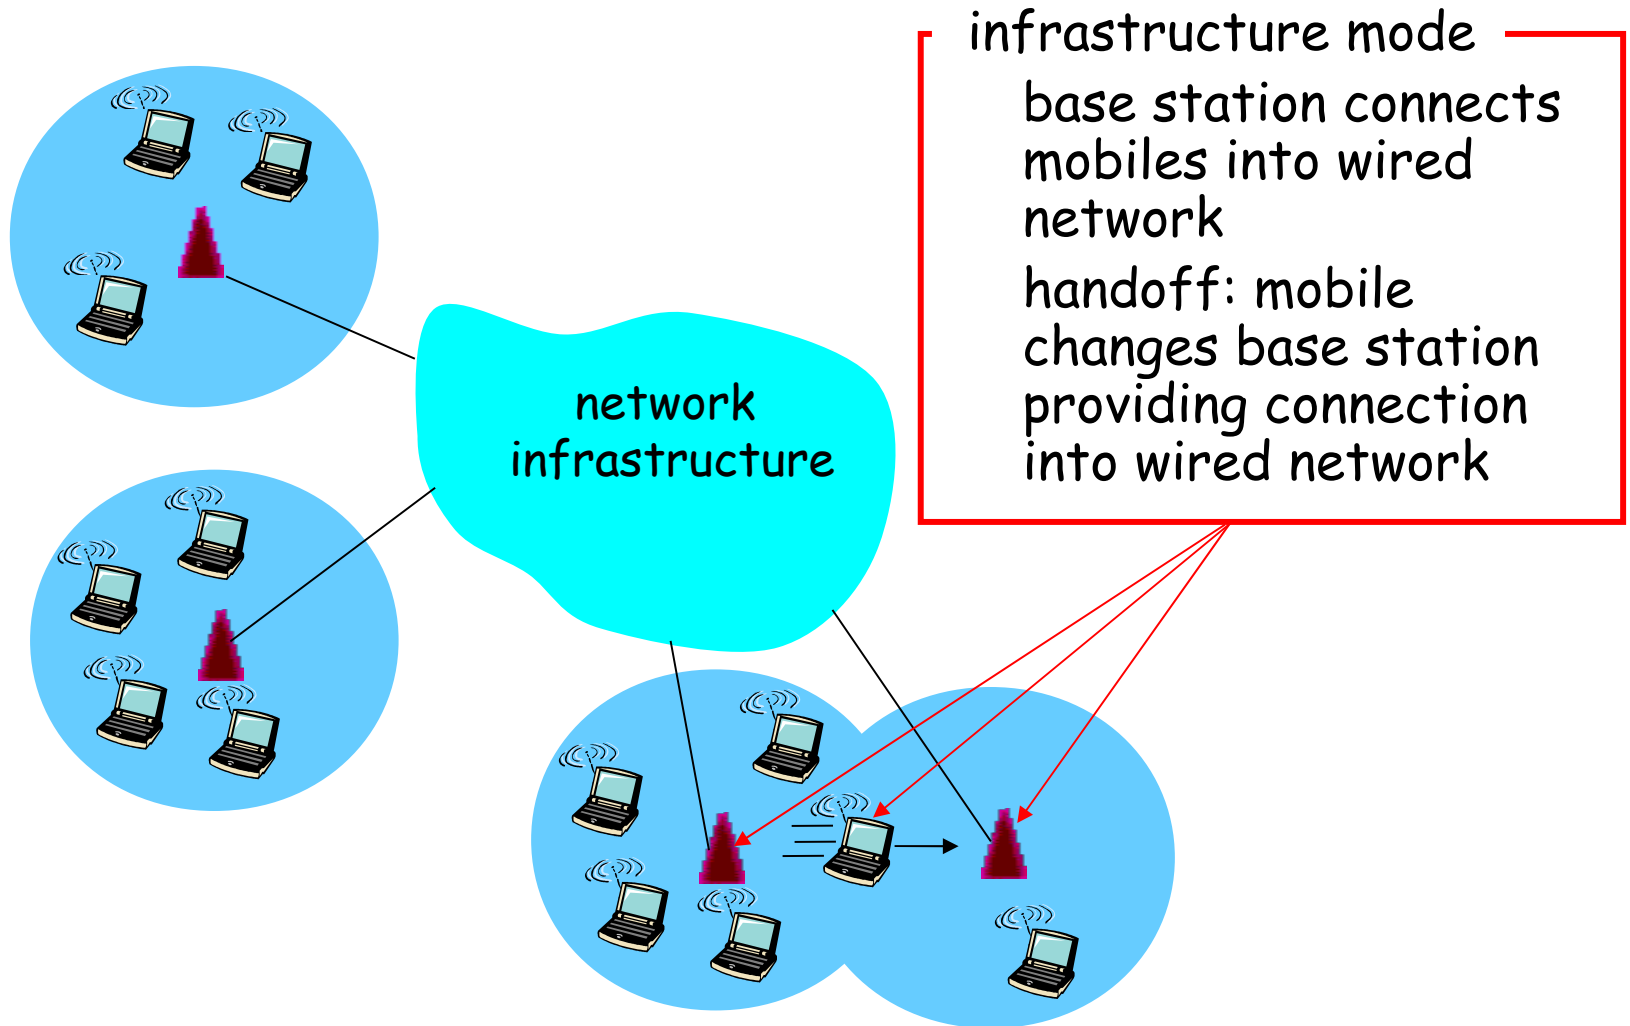

Elements of a wireless network

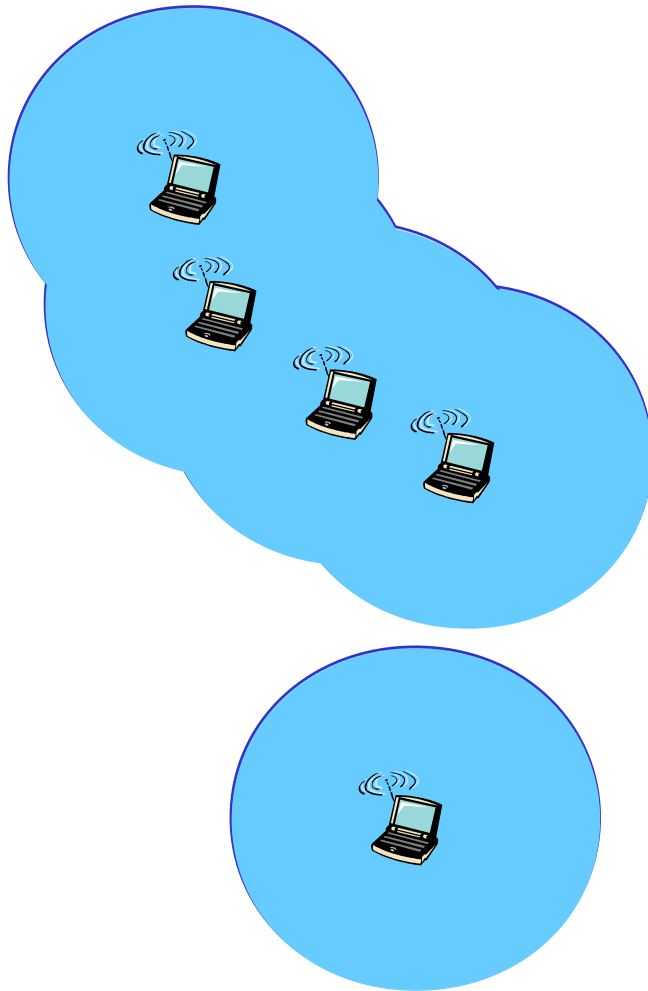

ad hoc mode

no base stations

nodes can only
transmit to other
nodes within link
coverage

nodes organize
themselves into a
network: route among
themselves

Wireless network taxonomy

	single hop	multiple hops
infrastructure (e.g., APs)	host connects to base station (WiFi, WiMAX, cellular) which connects to larger Internet	host may have to relay through several wireless nodes to connect to larger Internet: <i>mesh net</i>
no infrastructure	no base station, no connection to larger Internet (Bluetooth, ad hoc nets)	no base station, no connection to larger Internet. May have to relay to reach other a given wireless node MANET, VANET

Wireless Link Characteristics (1)

Differences from wired link

decreased signal strength: radio signal attenuates as it propagates through matter (path loss)

interference from other sources: standardized wireless network frequencies (e.g., 2.4 GHz) shared by other devices (e.g., phone); devices (motors) interfere as well

multipath propagation: radio signal reflects off objects ground, arriving at destination at slightly different times

.... make communication across (even a point to point) wireless link much more "difficult"

Wireless Link Characteristics (2)

SNR: signal-to-noise ratio
larger SNR - easier to
extract signal from noise (a
"good thing")

SNR versus BER tradeoffs


given physical layer:

increase power \rightarrow increase
SNR \rightarrow decrease BER

given SNR: choose physical
layer that meets BER
requirement, giving highest
thruput

- SNR may change with
mobility: dynamically adapt
physical layer (modulation
technique, rate)

BER = Bit Error Rate

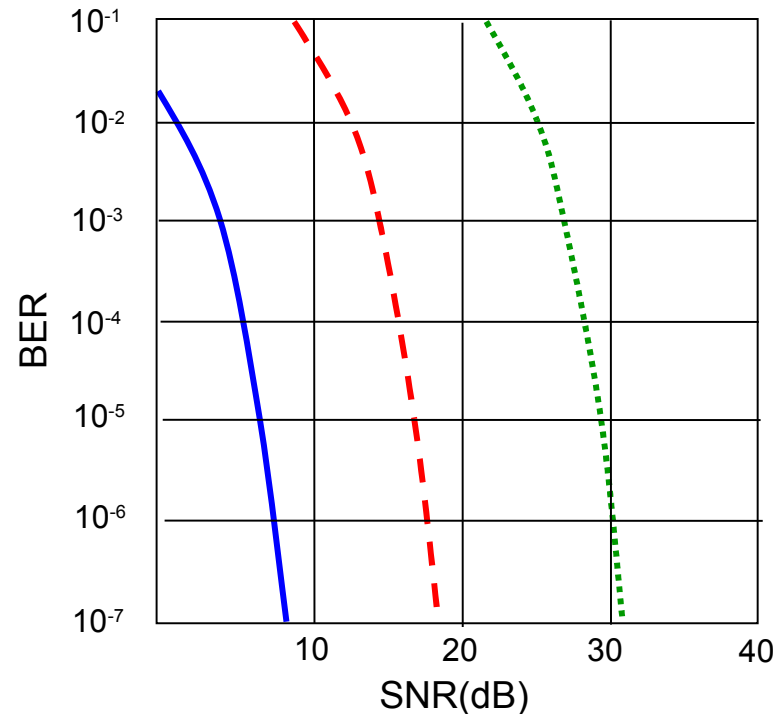



..... QAM256 (8 Mbps)

- - - QAM16 (4 Mbps)

— BPSK (1 Mbps)

Wireless network characteristics

Multiple wireless senders and receivers create additional problems (beyond multiple access):

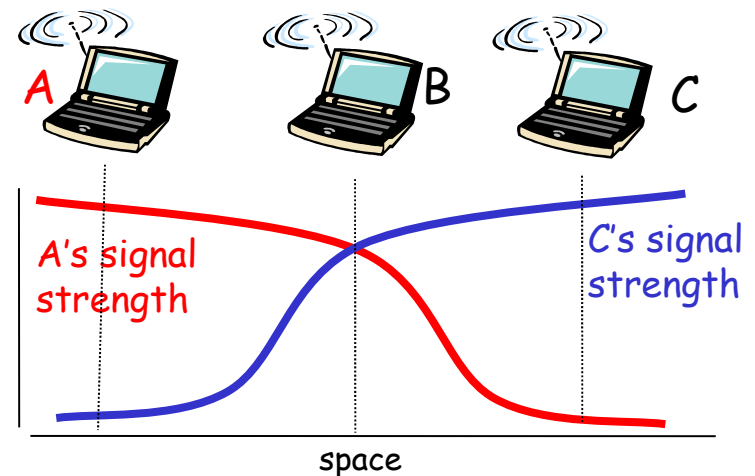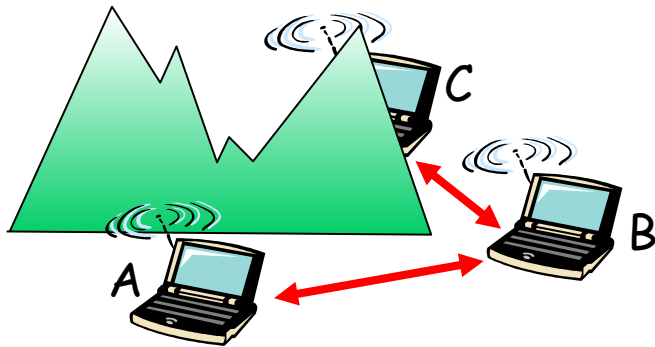

Hidden terminal problem

B, A hear each other

B, C hear each other

A, C can not hear each other

means A, C unaware of their interference at B

Signal attenuation:

B, A hear each other

B, C hear each other

A, C can not hear each other
interfering at B

Code Division Multiple Access (CDMA)

used in several wireless broadcast channels (cellular, satellite, etc) standards

unique "code" assigned to each user; i.e., code set partitioning


all users share same frequency, but each user has own "chipping" sequence (i.e., code) to encode data

encoded signal = (original data) X (chipping sequence)

decoding: inner-product of encoded signal and chipping sequence



allows multiple users to "coexist" and transmit simultaneously with minimal interference (if codes are "orthogonal")

CDMA Encode/Decode

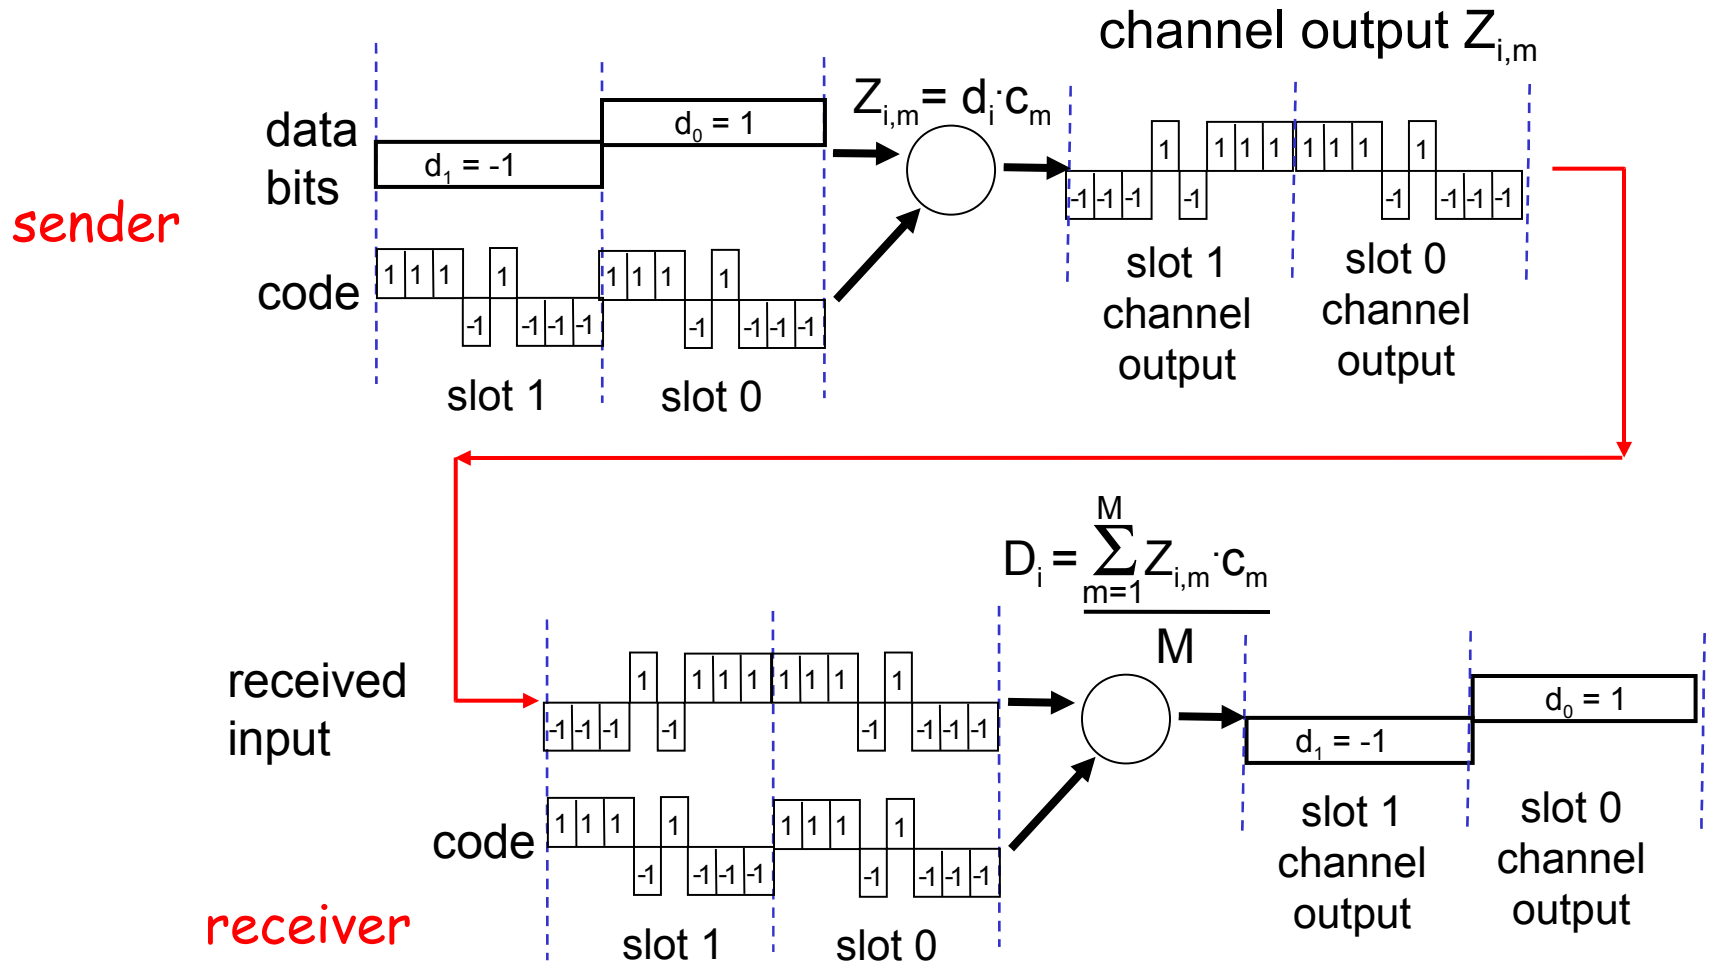

CDMA: two-sender interference

senders

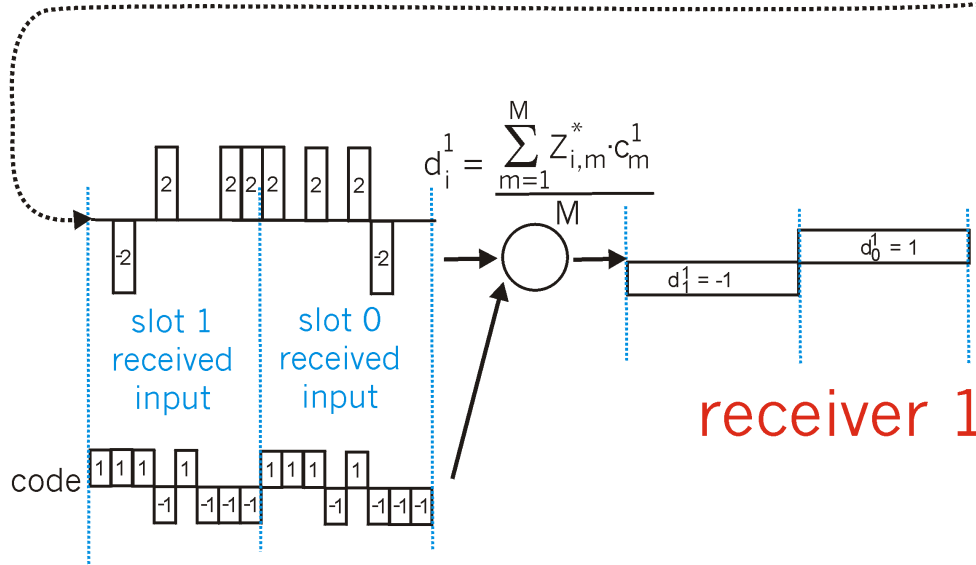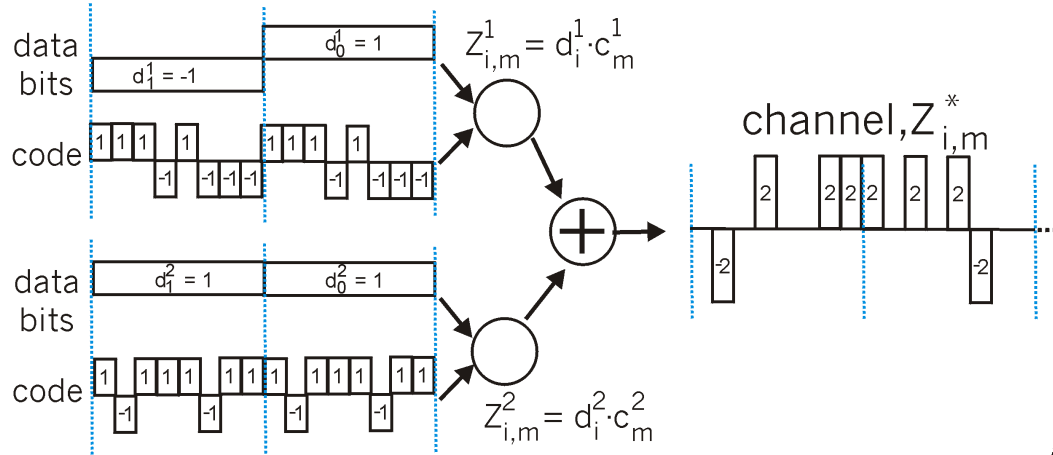

Chapter 6 outline

6.1 Introduction

Wireless

6.2 Wireless links,
characteristics

CDMA

6.3 IEEE 802.11
wireless LANs ("wi-fi")

6.4 cellular Internet
access

architecture

standards (e.g., GSM)

Mobility

6.5 Principles:
addressing and routing
to mobile users

6.6 Mobile IP

6.7 Handling mobility in
cellular networks

6.8 Mobility and higher-
layer protocols

6.9 Summary

IEEE 802.11 Wireless LAN

802.11b

2.4-5 GHz unlicensed spectrum

up to 11 Mbps

direct sequence spread

spectrum (DSSS) in physical layer

- all hosts use same chipping code

802.11a

5-6 GHz range

up to 54 Mbps

802.11g

2.4-5 GHz range

up to 54 Mbps

802.11n: multiple antennae


2.4-5 GHz range

up to 200 Mbps

all use CSMA/CA for multiple access

all have base-station and ad-hoc network versions

802.11 LAN architecture

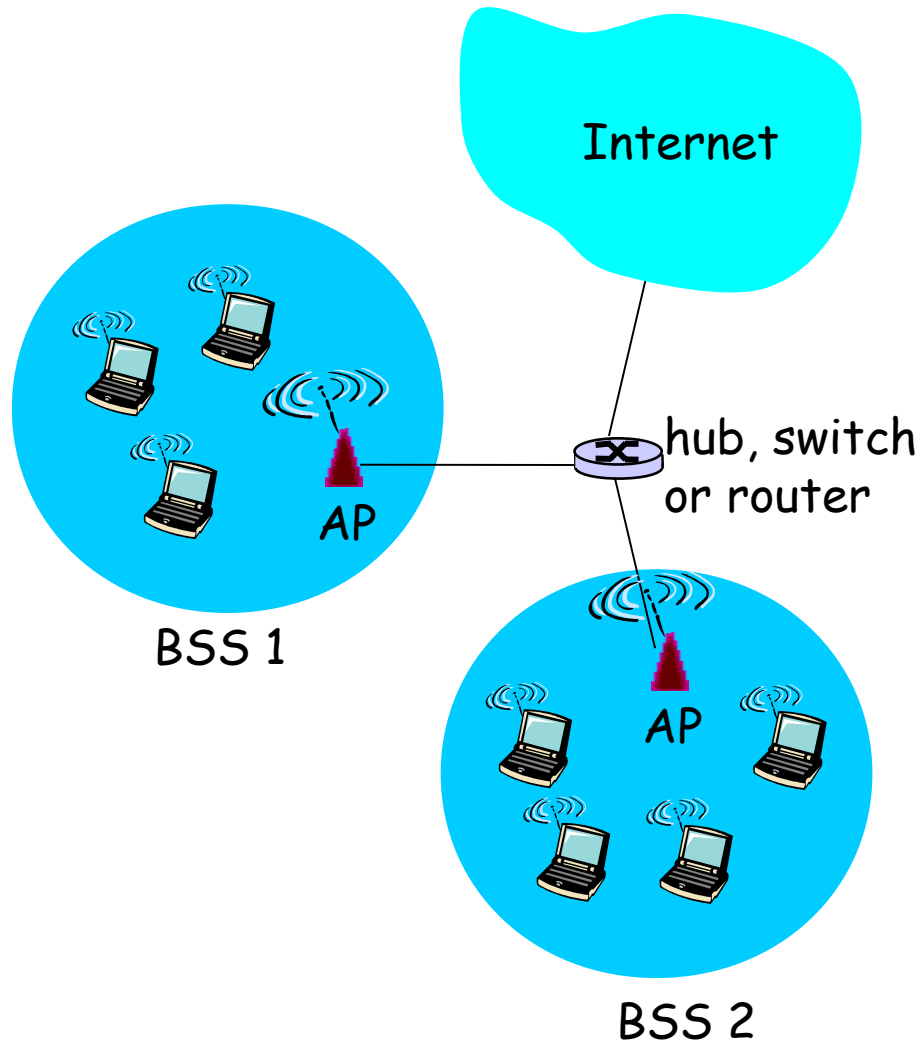

wireless host communicates with base station

base station = access point (AP)

Basic Service Set (BSS) (aka "cell") in infrastructure mode contains:

wireless hosts

access point (AP): base station

ad hoc mode: hosts only

802.11: Channels, association

802.11b: 2.4GHz-2.485GHz spectrum divided into 11 channels at different frequencies

AP admin chooses frequency for AP

interference possible: channel can be same as that chosen by neighboring AP!

host: must *associate* with an AP


scans channels, listening for *beacon frames* containing AP's name (SSID) and MAC address

selects AP to associate with

may perform authentication [Chapter 8]


will typically run DHCP to get IP address in AP's subnet

802.11: passive/active scanning

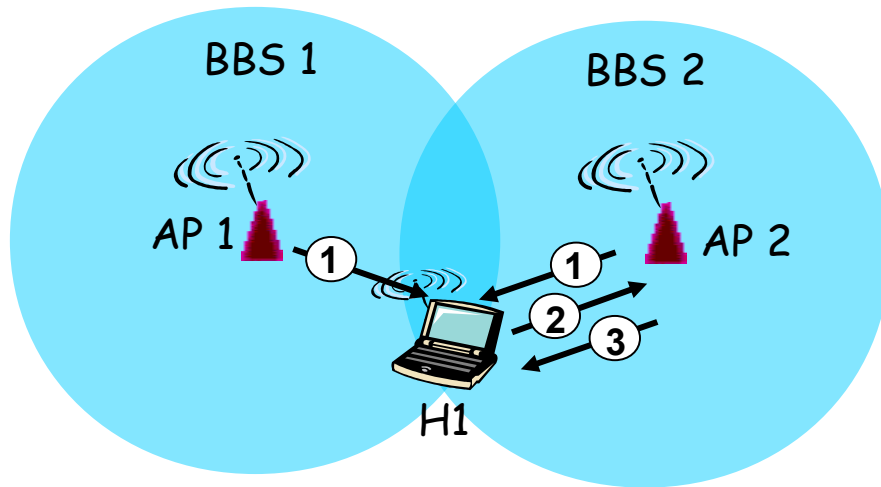

Passive Scanning:

- (1) beacon frames sent from APs
- (2) association Request frame sent:
H1 to selected AP
- (3) association Response frame sent:
H1 to selected AP

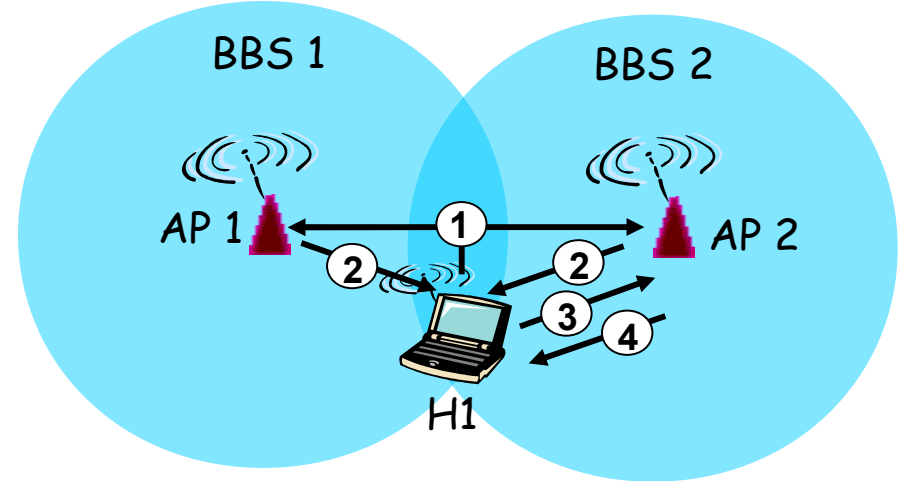

Active Scanning:

- (1) Probe Request frame broadcast
from H1
- (2) Probes response frame sent from
APs
- (3) Association Request frame sent:
H1 to selected AP
- (4) Association Response frame
sent: H1 to selected AP

IEEE 802.11: multiple access

avoid collisions: 2+ nodes transmitting at same time

802.11: CSMA - sense before transmitting



don't collide with ongoing transmission by other node

802.11: *no* collision detection!

difficult to receive (sense collisions) when transmitting due to weak received signals (fading)

can't sense all collisions in any case: hidden terminal, fading

goal: *avoid collisions*: CSMA/C(ollision)A(avoidance)

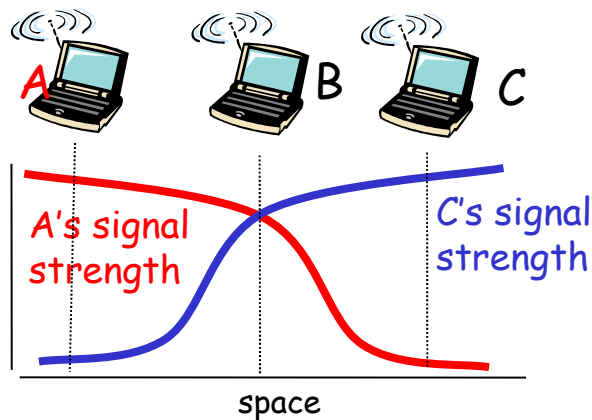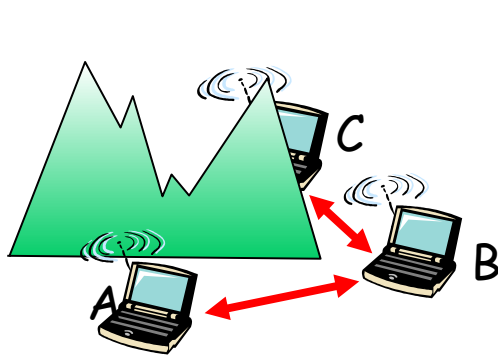


IEEE 802.11 MAC Protocol: CSMA/CA

802.11 sender

- 1 if sense channel idle for **DIFS** then transmit entire frame (no CD)
- 2 if sense channel busy then start random backoff time
timer counts down while channel idle
transmit when timer expires
if no ACK, increase random backoff interval, repeat 2

802.11 receiver

- if frame received OK
return ACK after **SIFS** (ACK needed due to hidden terminal problem)

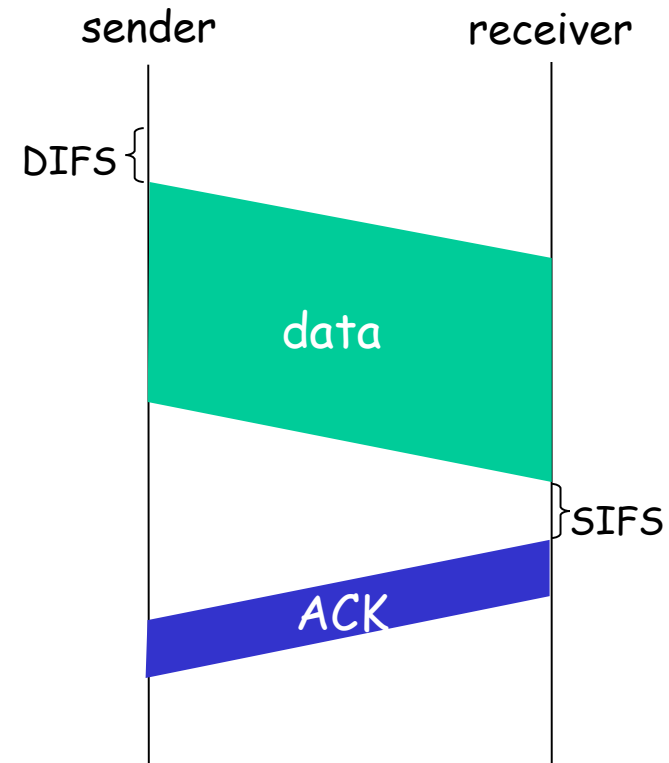

DIFS = Distributed Inter-Frame Space
SIFS = Short Inter-Frame Space

Avoiding collisions (more)

idea: allow sender to "reserve" channel rather than random access of data frames: avoid collisions of long data frames
sender first transmits *small* request-to-send (RTS) packets to BS using CSMA

RTSs may still collide with each other (but they're short)

BS broadcasts clear-to-send CTS in response to RTS


CTS heard by all nodes

sender transmits data frame


other stations defer transmissions

avoid data frame collisions completely
using small reservation packets!

Collision Avoidance: RTS-CTS exchange

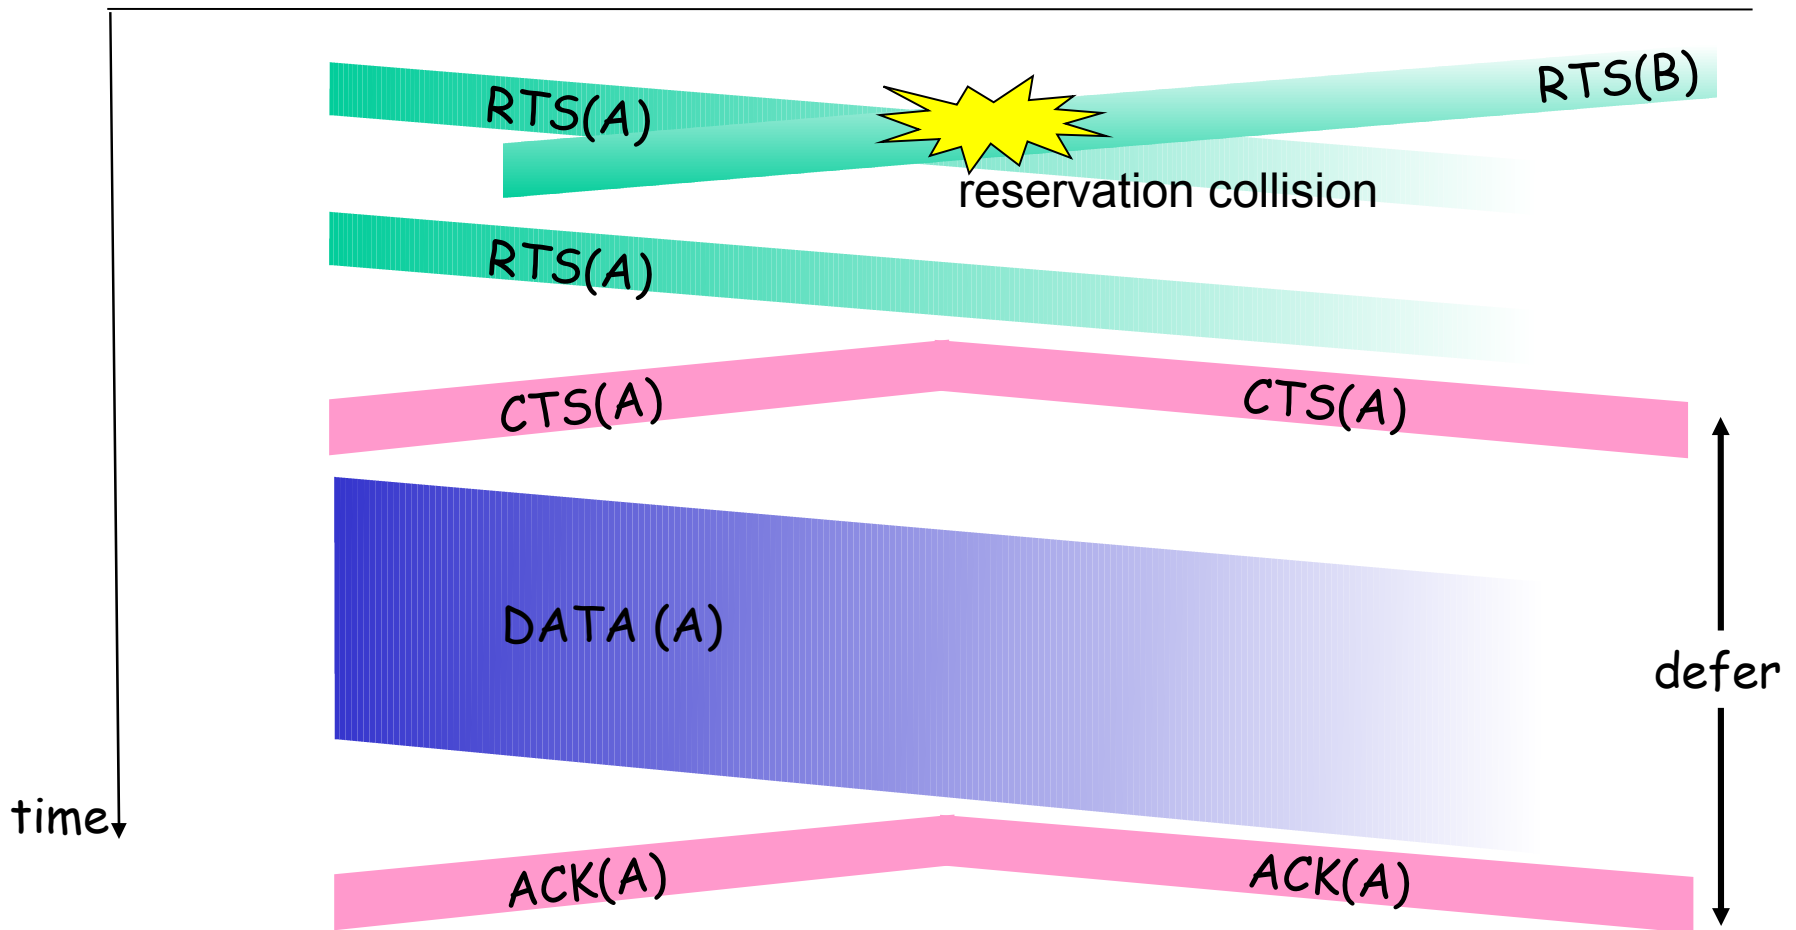

802.11 frame: addressing

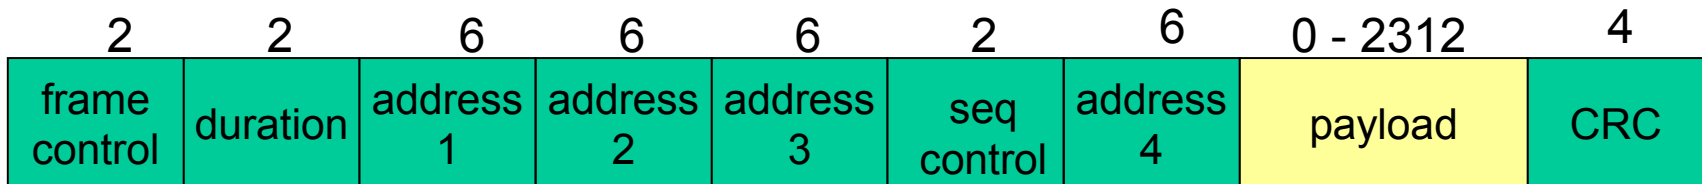


Address 1: MAC address of wireless host or AP to receive this frame

Address 2: MAC address of wireless host or AP transmitting this frame


Address 3: MAC address of router interface to which AP is attached

Address 4: used only in ad hoc mode

802.11 frame: addressing

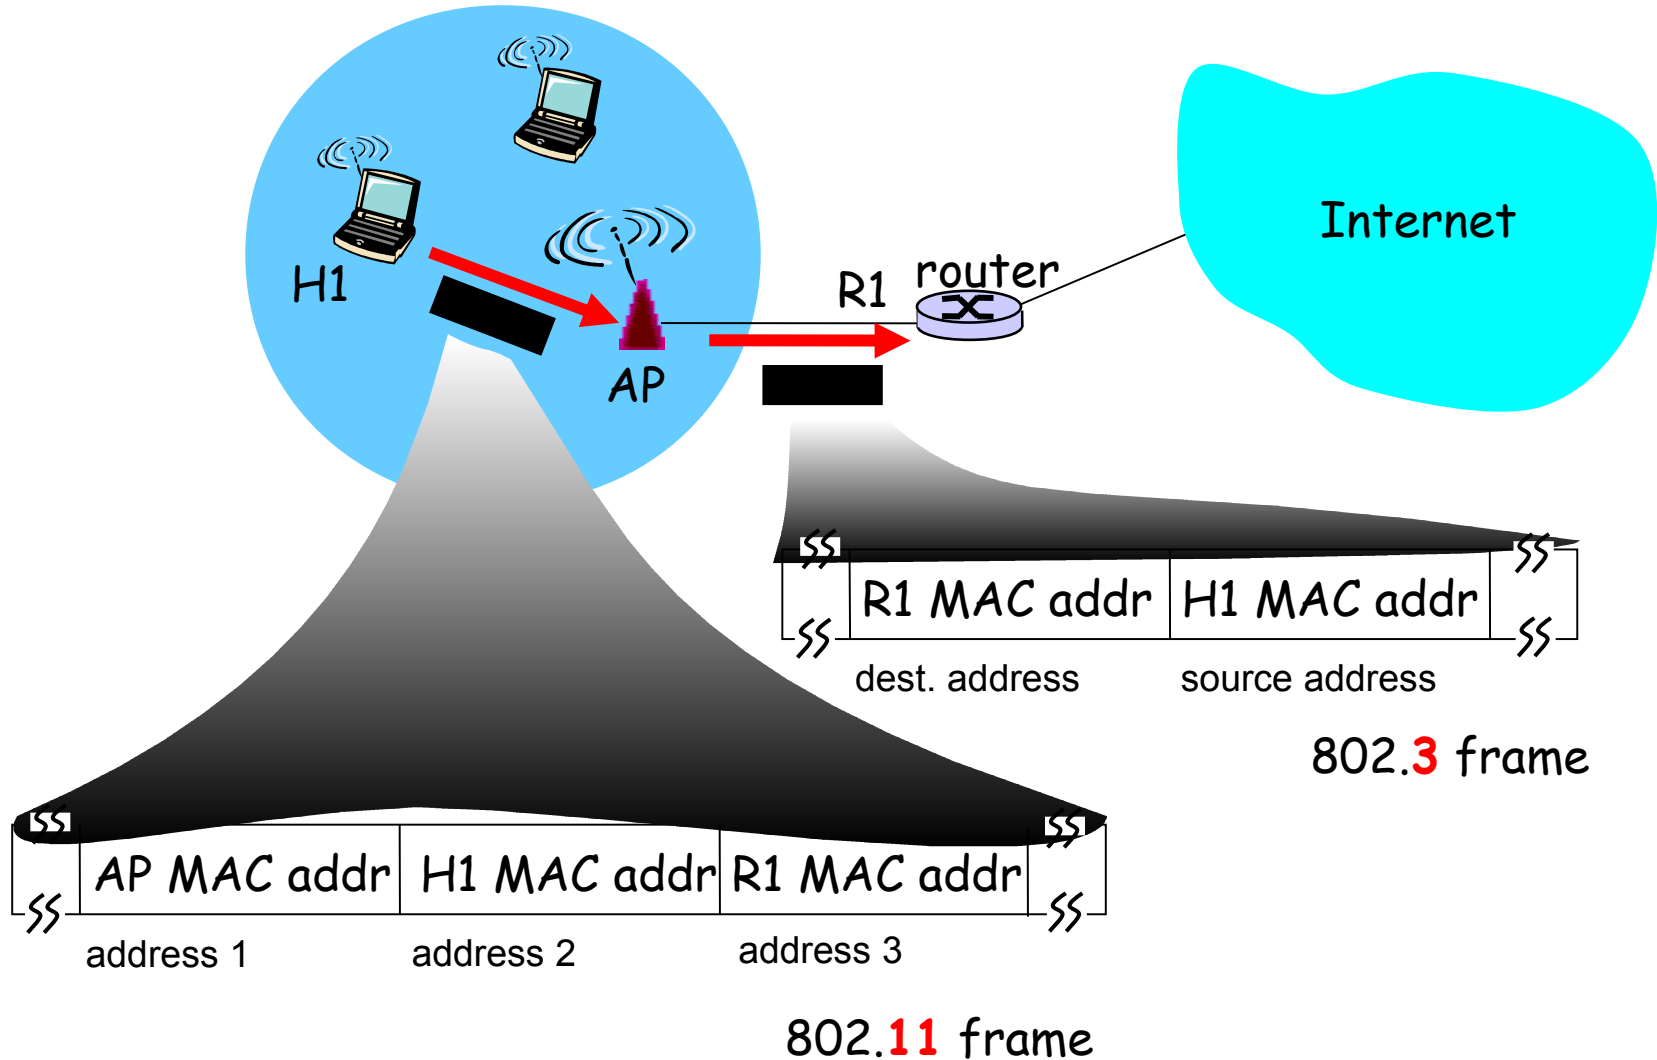

802.11 frame: more

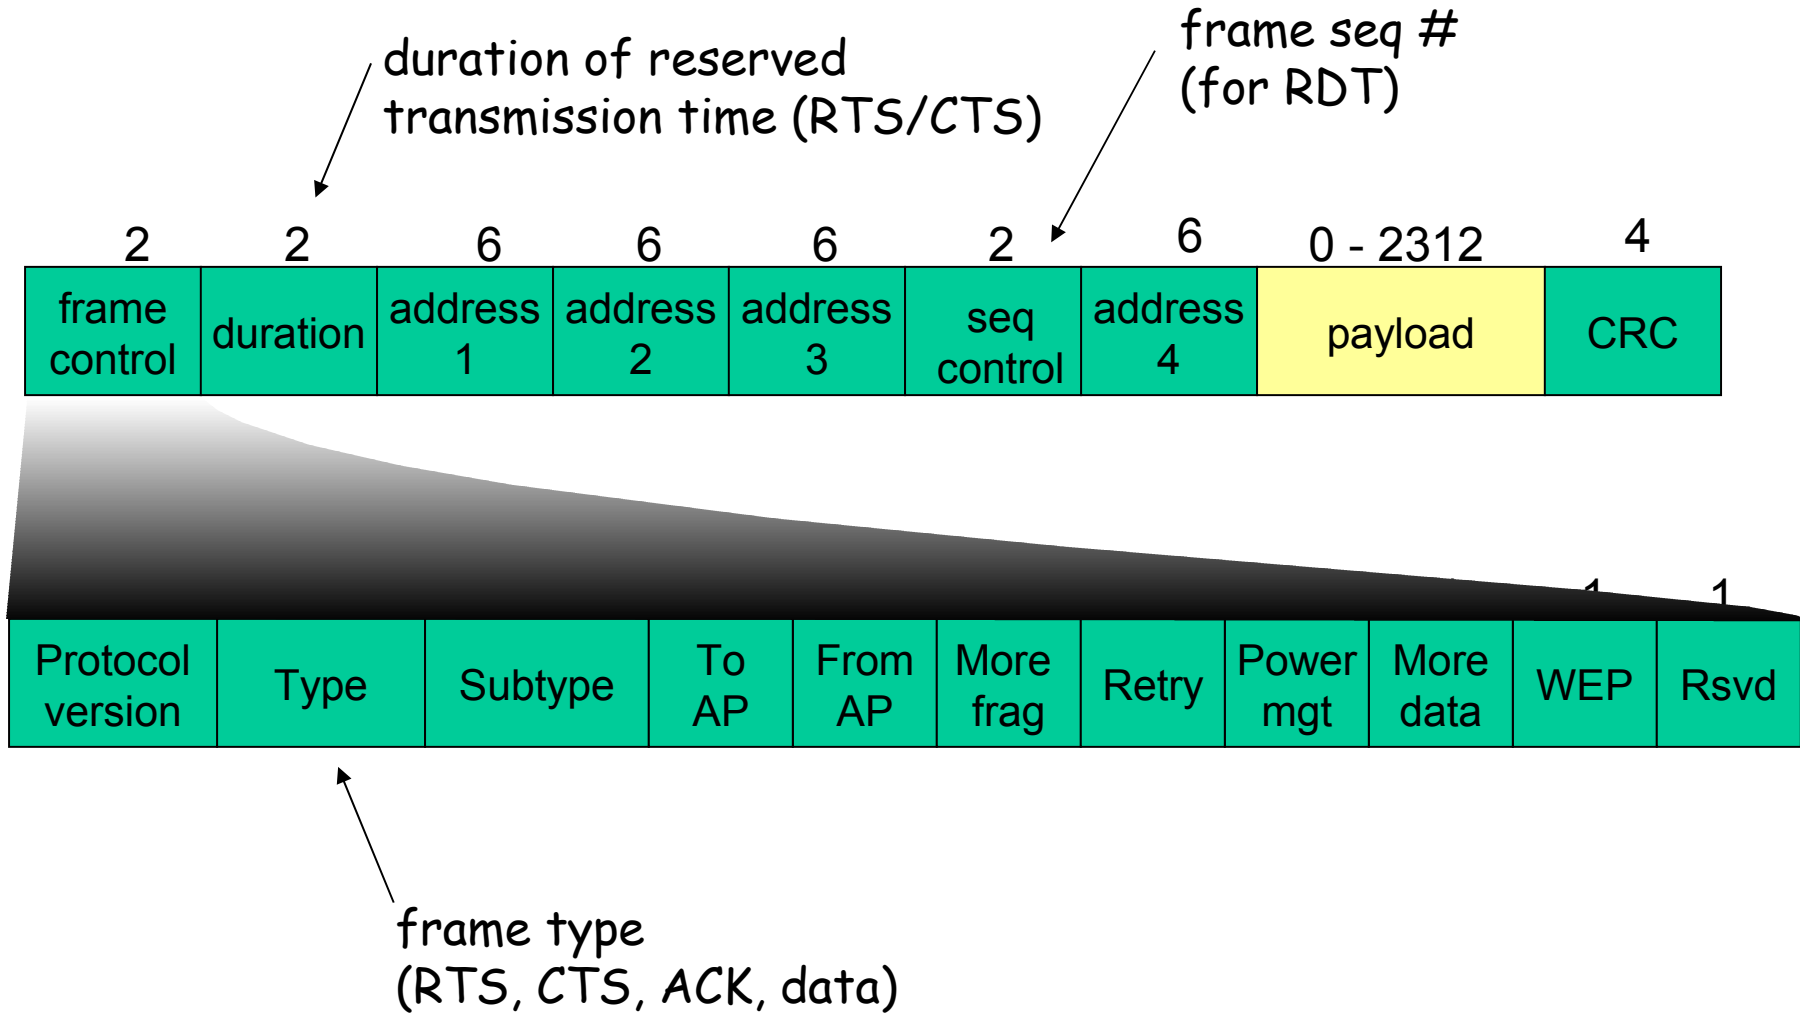


802.11: mobility within same subnet

H1 remains in same IP subnet:
IP address can remain same

switch: which AP is associated with H1?



self-learning (Ch. 5):
switch will see frame from H1 and "remember" which switch port can be used to reach H1 - so AP2 needs to broadcast the address of H1 so the switch can learn the new port.

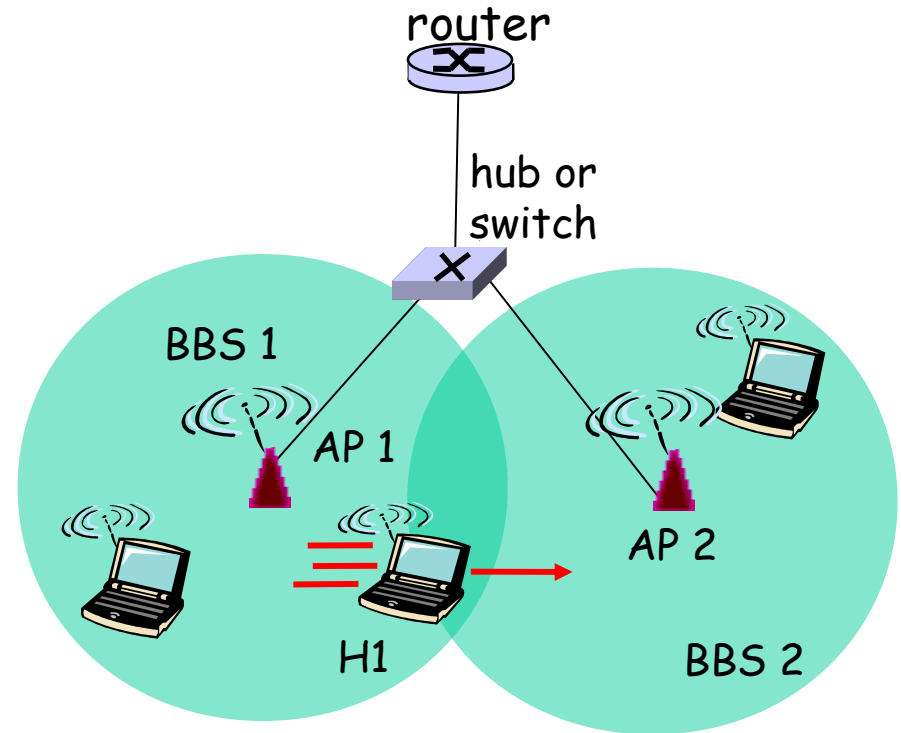

802.11: advanced capabilities

Rate Adaptation

base station, mobile
dynamically change
transmission rate
(physical layer
modulation technique)
as mobile moves, SNR
varies

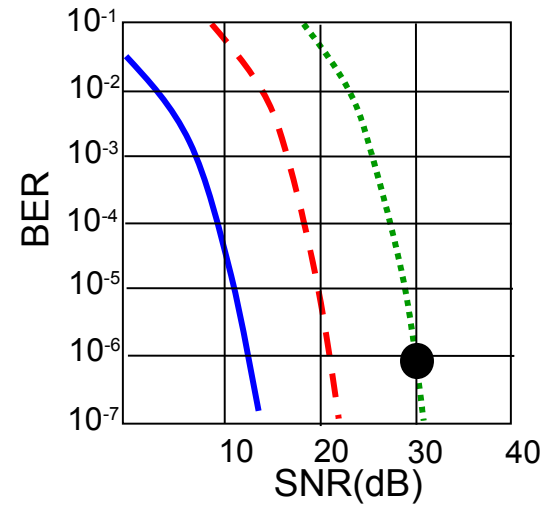

1. SNR decreases, BER increase as node moves away from base station
2. When BER becomes too high, switch to lower transmission rate but with lower BER

802.11: advanced capabilities

Power Management

node-to-AP: "I am going to sleep until next beacon frame"

AP knows not to transmit frames to this node

node wakes up before next beacon frame

beacon frame: contains list of mobiles with AP-to-mobile frames waiting to be sent

node will stay awake if AP-to-mobile frames to be sent; otherwise sleep again until next beacon frame

802.15: personal area network

less than 10 m diameter
replacement for cables
(mouse, keyboard,
headphones)

ad hoc: no infrastructure


master/slaves:

slaves request permission to
send (to master)

master grants requests

802.15: evolved from
Bluetooth specification

2.4-2.5 GHz radio band
up to 721 kbps

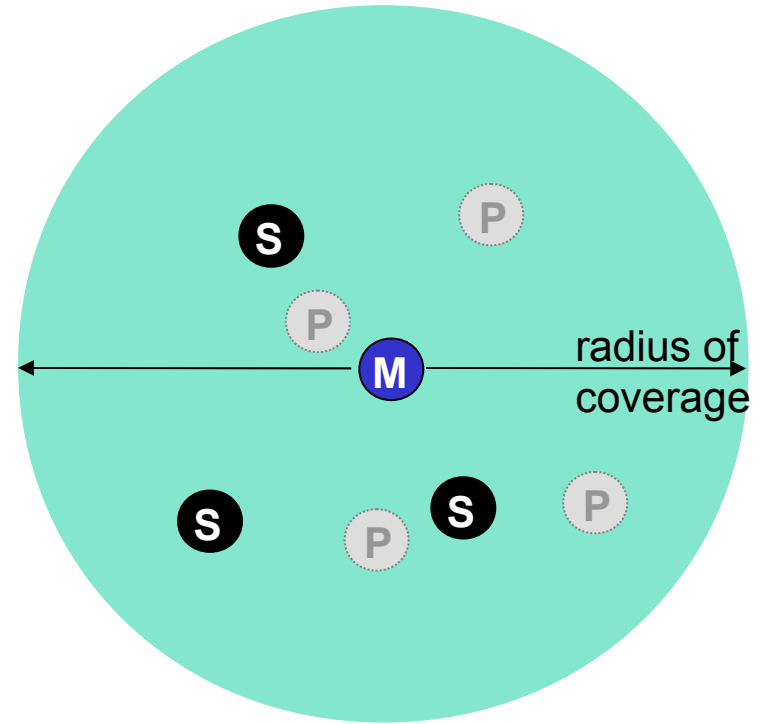

- M** Master device
- S** Slave device
- P** Parked device (inactive)

802.16: WiMAX

like 802.11 & cellular:
base station model


transmissions to/from
base station by hosts
with omnidirectional
antenna

base station-to-base
station backhaul with
point-to-point antenna

unlike 802.11:

range ~ 6 miles ("city
rather than coffee
shop")

~14 Mbps

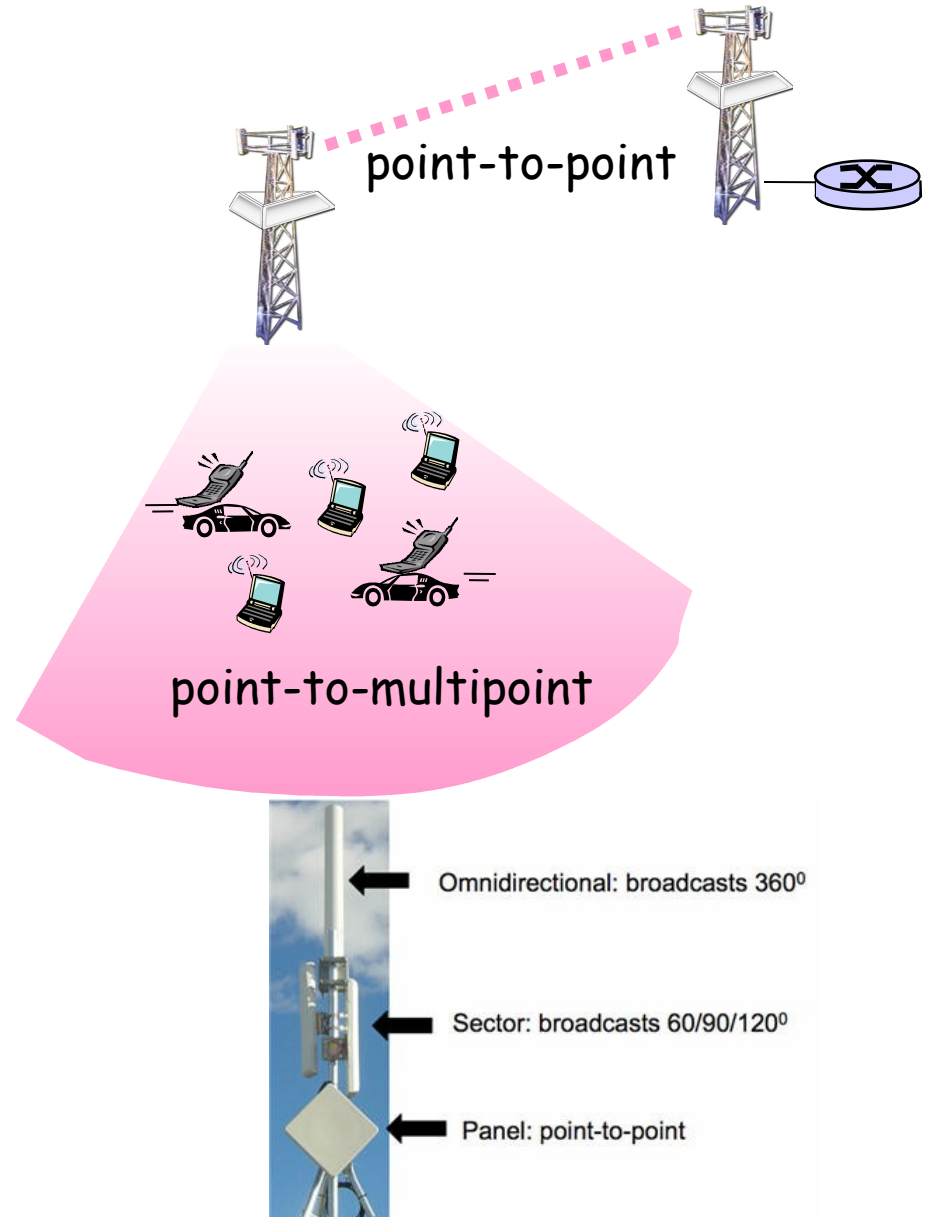


802.16: WiMAX: downlink, uplink scheduling

transmission frame

down-link subframe: base station to node

uplink subframe: node to base station

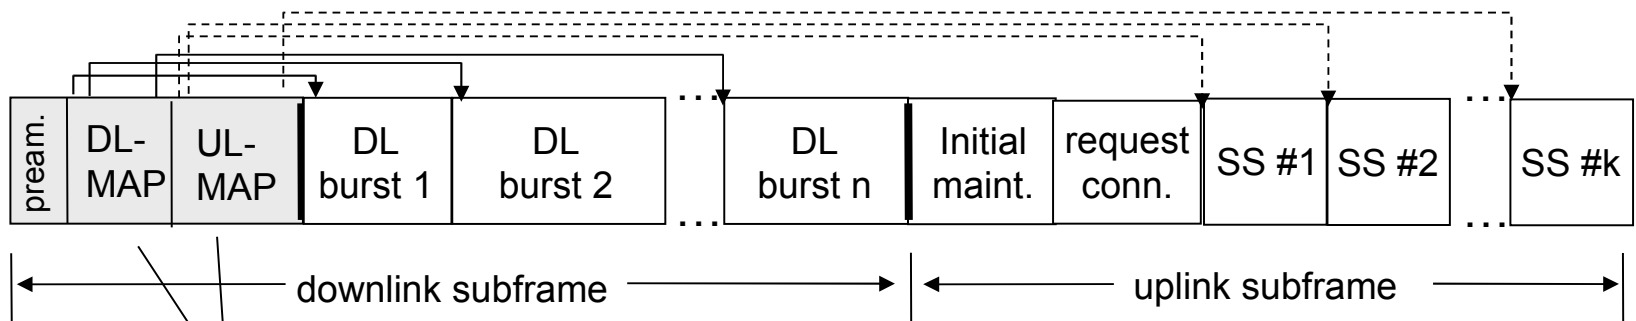

base station tells nodes who will get to receive (DL map)
and who will get to send (UL map), and when

WiMAX standard provide mechanism for
scheduling, but not scheduling algorithm

Chapter 6 outline

6.1 Introduction

Wireless

6.2 Wireless links,
characteristics

CDMA

6.3 IEEE 802.11
wireless LANs ("wi-fi")

6.4 Cellular Internet
Access

architecture
standards (e.g., GSM)

Mobility

6.5 Principles:
addressing and routing
to mobile users

6.6 Mobile IP

6.7 Handling mobility in
cellular networks

6.8 Mobility and higher-
layer protocols

6.9 Summary


Components of cellular network architecture

cell

- covers geographical region
- *base station* (BS) analogous to 802.11 AP
- *mobile users* attach to network through BS
- *air-interface*: physical and link layer protocol between mobile and BS

MSC

- connects cells to wide area net
- manages call setup (more later!)
- handles mobility (more later!)

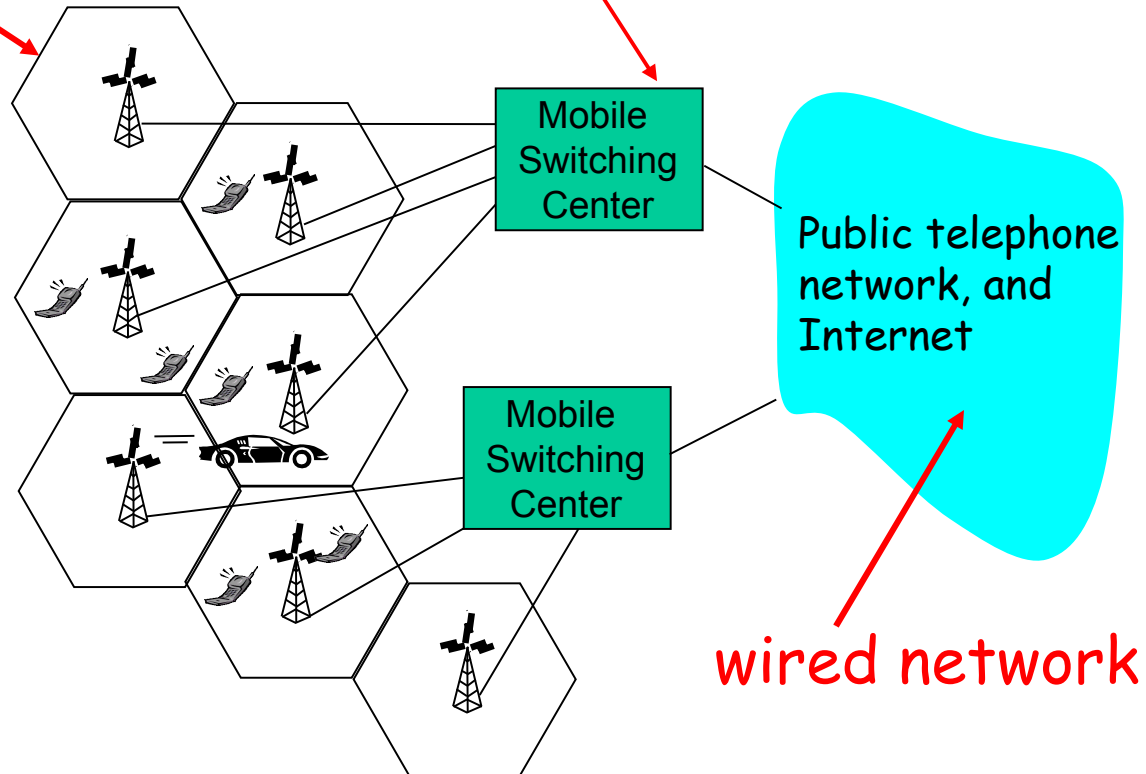


Cellular networks: the first hop

Two techniques for sharing mobile-to-BS radio spectrum

combined FDMA/TDMA:


divide spectrum in frequency channels, divide each channel into time slots

CDMA: code division multiple access

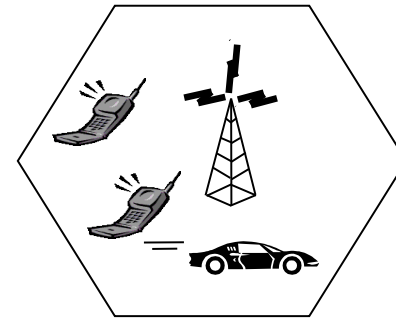

time slots

frequency bands

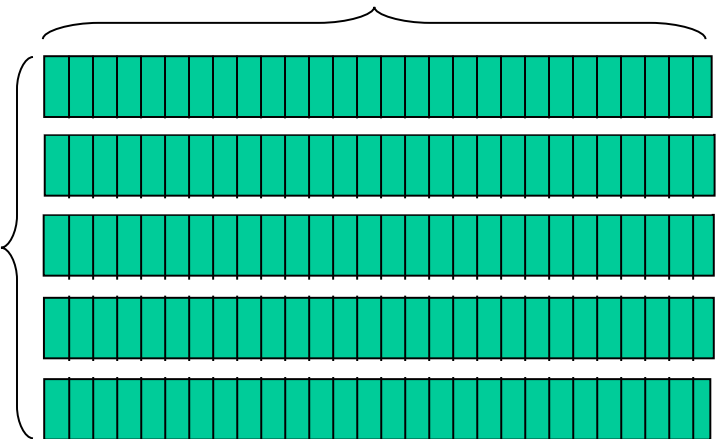

Cellular standards: brief survey


2G systems: voice channels

IS-136 TDMA: combined FDMA/TDMA (north america)

GSM (global system for mobile communications):
combined FDMA/TDMA

most widely deployed

IS-95 CDMA: code division multiple access

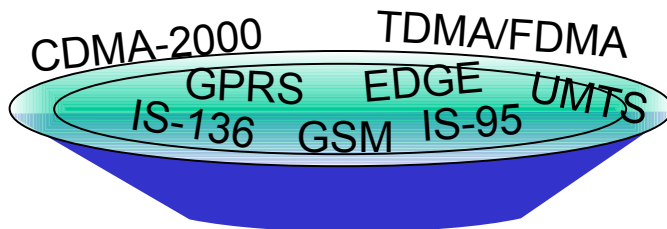

Don't drown in a bowl
of alphabet soup: use this
for reference only

Cellular standards: brief survey

2.5 G systems: voice and data channels

for those who can't wait for 3G service: 2G extensions
general packet radio service (**GPRS**)

evolved from GSM

data sent on multiple channels (if available)

enhanced data rates for global evolution (**EDGE**)

also evolved from GSM, using enhanced modulation

data rates up to 384K

CDMA-2000 (phase 1)

data rates up to 144K

evolved from IS-95

Cellular standards: brief survey

3G systems: voice/data

Universal Mobile Telecommunications Service (UMTS)

data service: High Speed Uplink/Downlink packet
Access (HSDPA/HSUPA): 3 Mbps

CDMA-2000: CDMA in TDMA slots

data service: 1xEvolution Data Optimized (1xEVDO)
up to 14 Mbps

..... more (and more interesting) cellular topics due to mobility (stay tuned for details)

Chapter 6 outline

6.1 Introduction

Wireless

6.2 Wireless links,
characteristics

CDMA

6.3 IEEE 802.11
wireless LANs ("wi-fi")

6.4 Cellular Internet
Access

architecture

standards (e.g., GSM)

Mobility

6.5 Principles:
addressing and routing
to mobile users

6.6 Mobile IP


6.7 Handling mobility in
cellular networks

6.8 Mobility and higher-
layer protocols

6.9 Summary

What is mobility?

spectrum of mobility, from the *network* perspective:


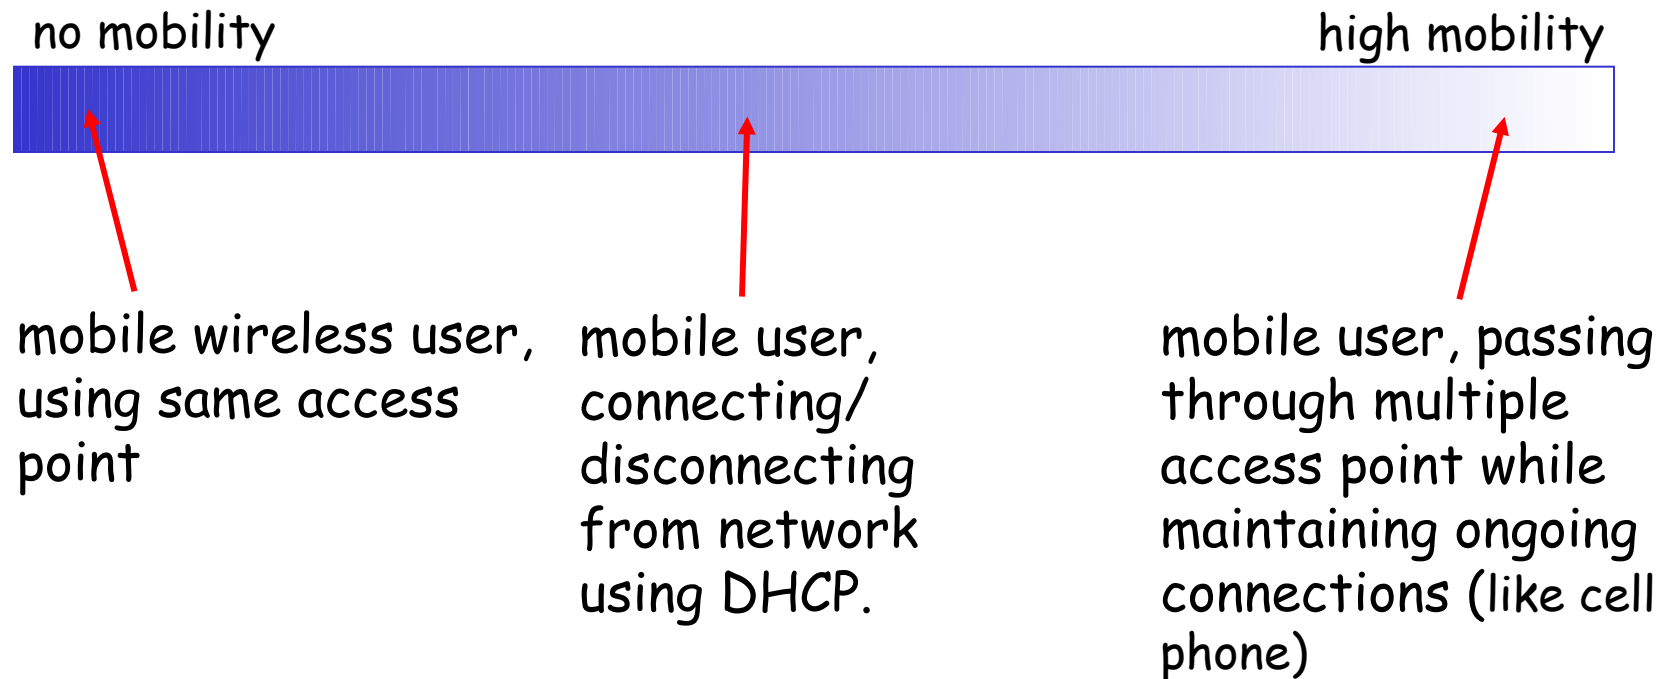


Mobility: Vocabulary

home network: permanent
"home" of mobile
(e.g., 128.119.40/24)

home agent: entity that will
perform mobility functions on
behalf of mobile, when mobile
is remote

Permanent address:
address in home
network, can always be
used to reach mobile
e.g., 128.119.40.186

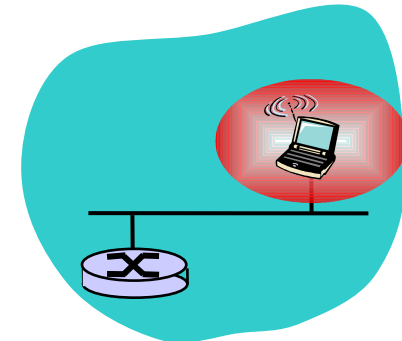
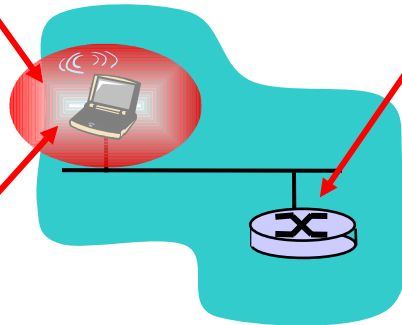


Mobility: more vocabulary


Permanent address: remains constant (e.g., 128.119.40.186)

visited network: network in which mobile currently resides (e.g., 79.129.13/24)

Care-of-address: address in visited network. (e.g., 79.129.13.2)

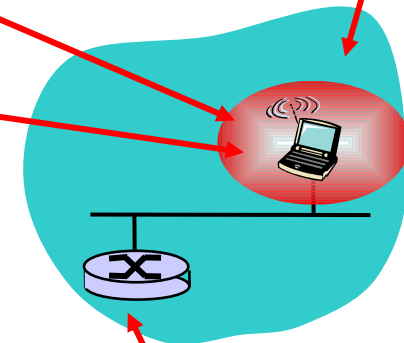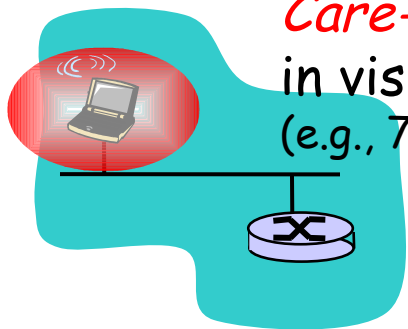

correspondent: wants to communicate with mobile

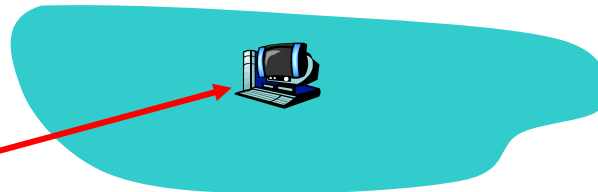

foreign agent: entity in visited network that performs mobility functions on behalf of mobile.


How do you contact a mobile friend:

Consider friend frequently changing addresses, how do you find her?

search all phone books?

call her parents?

expect her to let you know where he/she is?

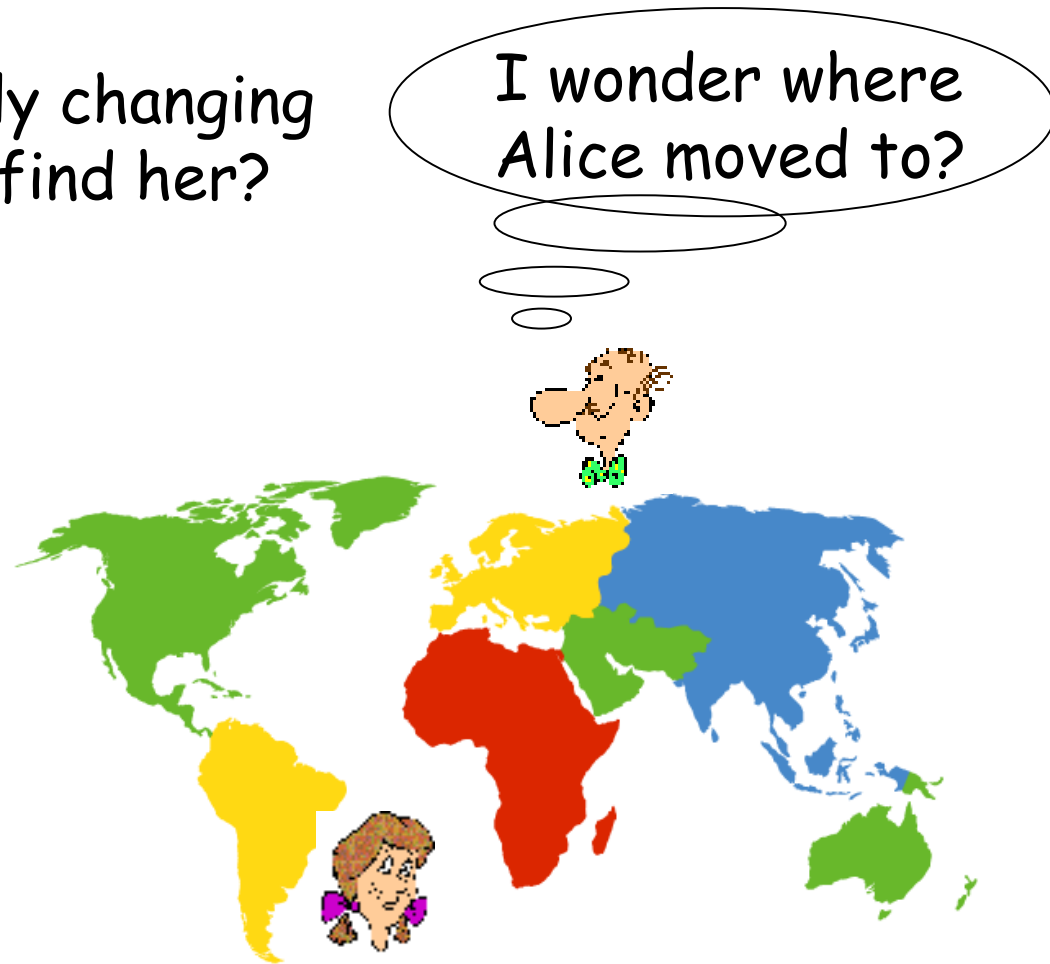

Mobility: approaches

Let routing handle it: routers advertise permanent address of mobile-nodes-in-residence via usual routing table exchange.

routing tables indicate where each mobile located
no changes to end-systems

Let end-systems handle it:

indirect routing: communication from correspondent to mobile goes through home agent, then forwarded to remote

direct routing: correspondent gets foreign address of mobile, sends directly to mobile

Mobility: approaches

Let routing handle it: routers advertise permanent address of mobile, mobile advertises current residence via usual routing table exchange. Problem: routing table entries for where each mobile located no changes to end systems


not
scalable
to millions of
mobiles

let end-systems handle it:

indirect routing: communication from correspondent to mobile goes through home agent, then forwarded to remote

direct routing: correspondent gets foreign address of mobile, sends directly to mobile

Mobility: registration

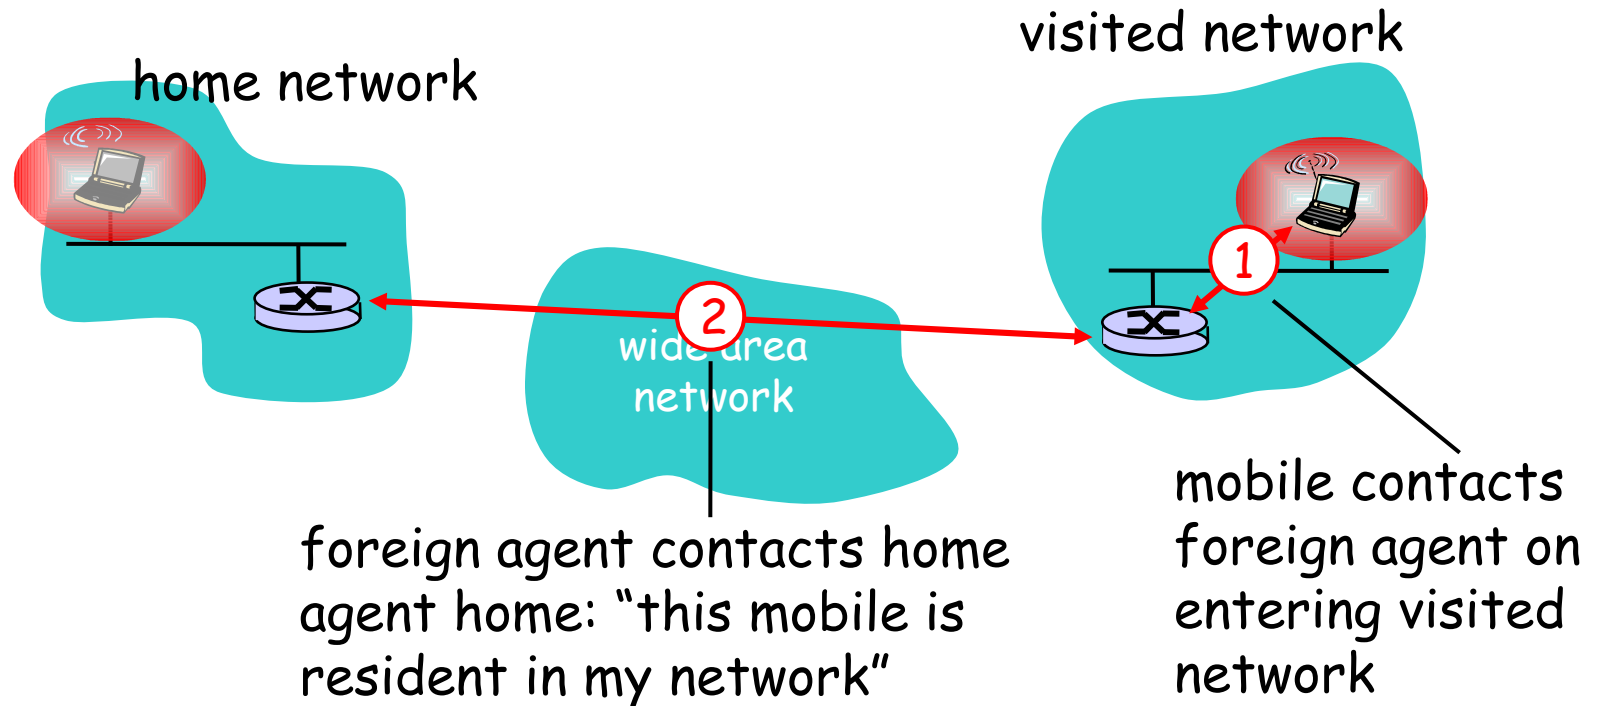


End result:

Foreign agent knows about mobile

Home agent knows location of mobile

Mobility via Indirect Routing

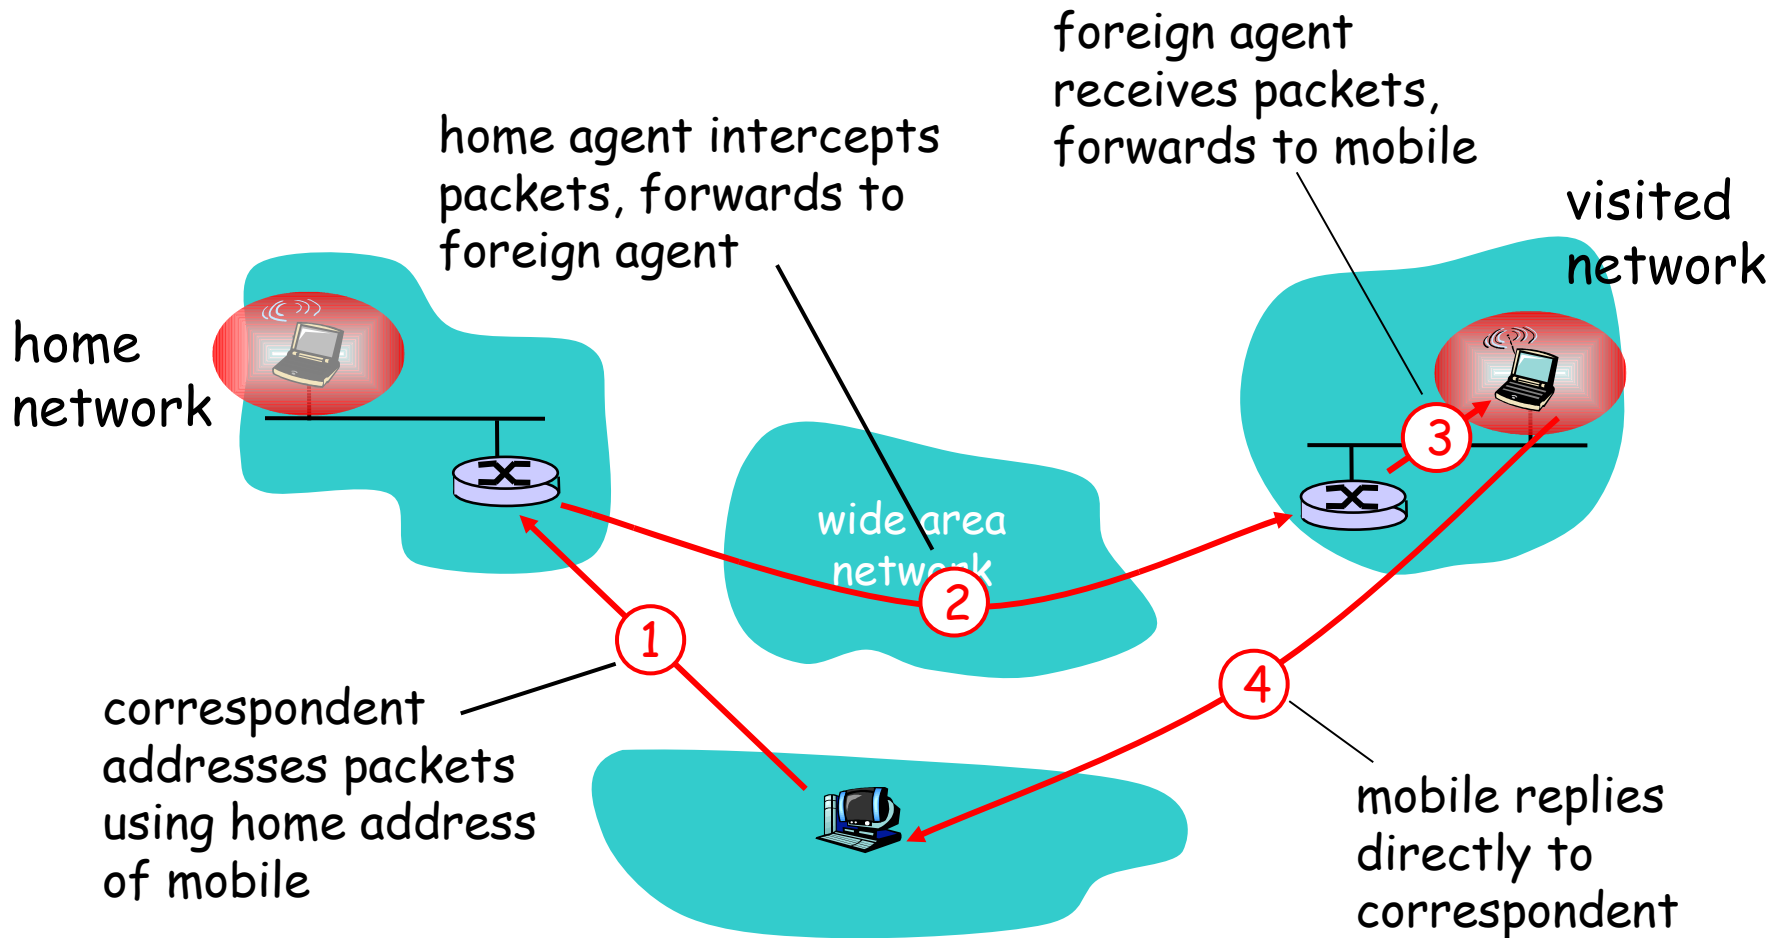

Indirect Routing: comments

Mobile uses two addresses:


permanent address: used by correspondent (hence mobile location is *transparent* to correspondent)

care-of-address: used by home agent to forward datagrams to mobile

foreign agent functions may be done by mobile itself

triangle routing: correspondent-home-network-mobile

inefficient when
correspondent, mobile
are in same network

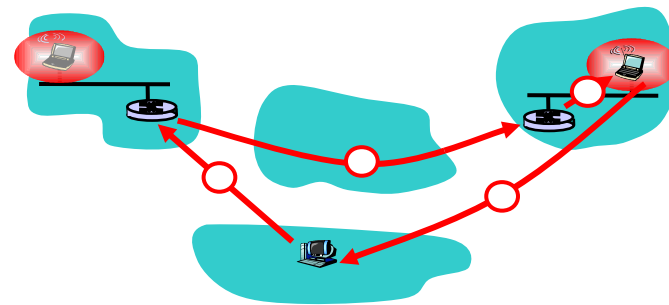

Indirect Routing: moving between networks

suppose mobile user moves to another network

registers with new foreign agent

new foreign agent registers with home agent


home agent update care-of-address for mobile

packets continue to be forwarded to mobile (but with new care-of-address)

mobility, changing foreign networks

transparent: *on going connections can be maintained!*

Mobility via Direct Routing

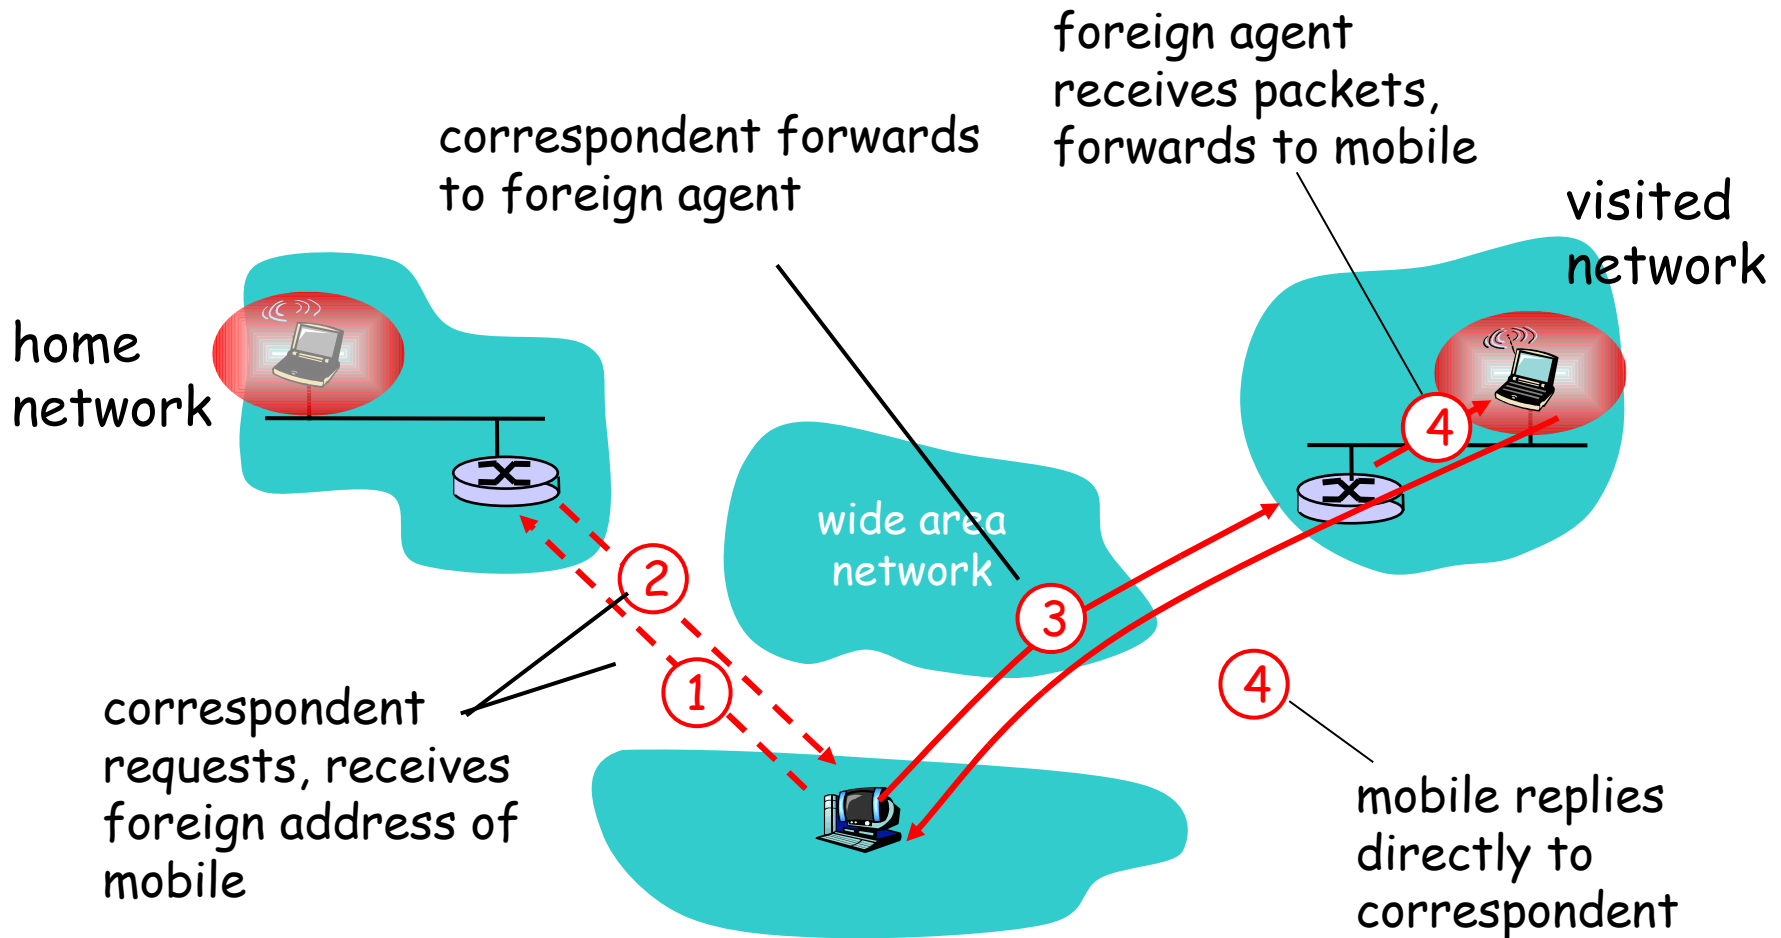


Mobility via Direct Routing: comments

overcome triangle routing problem

non-transparent to correspondent:

correspondent must get care-of-address
from home agent

what if mobile changes visited network?

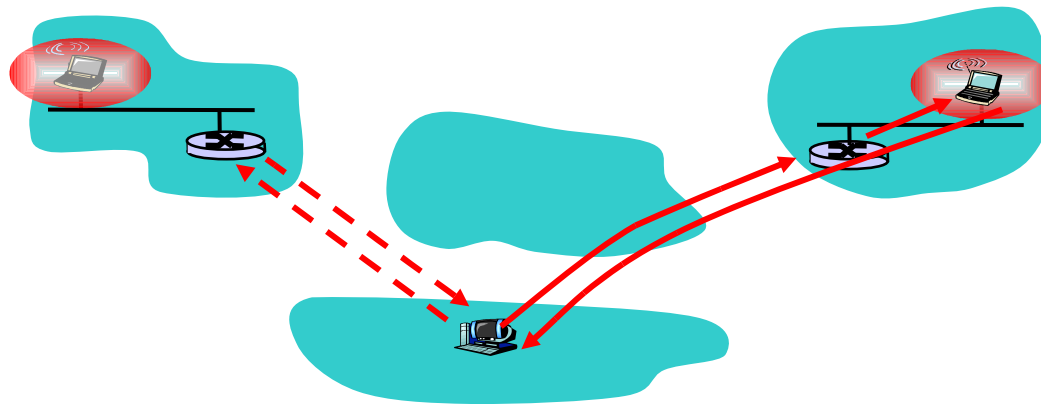


Accommodating mobility with direct routing

anchor foreign agent: FA in first visited network

data always routed first to anchor FA

when mobile moves: new FA arranges to have data forwarded from old FA (chaining)

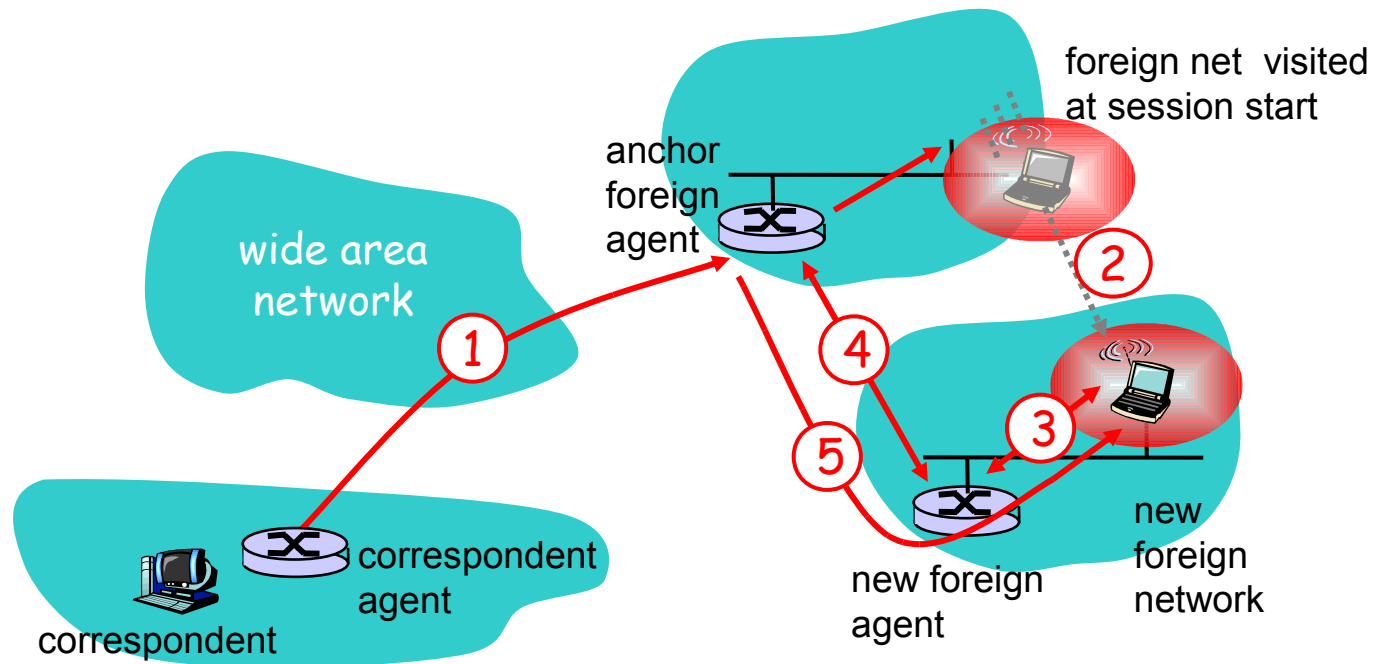

Chapter 6 outline

6.1 Introduction

Wireless

6.2 Wireless links,
characteristics

CDMA

6.3 IEEE 802.11
wireless LANs ("wi-fi")

6.4 Cellular Internet
Access

architecture

standards (e.g., GSM)

Mobility

6.5 Principles:
addressing and routing
to mobile users

6.6 Mobile IP

6.7 Handling mobility in
cellular networks

6.8 Mobility and higher-
layer protocols

6.9 Summary

Mobile IP

RFC 3344

has many features we've seen:

home agents, foreign agents, foreign-agent registration, care-of-addresses, encapsulation (packet-within-a-packet)


three components to standard:

indirect routing of datagrams

agent discovery


registration with home agent

Mobile IP: indirect routing

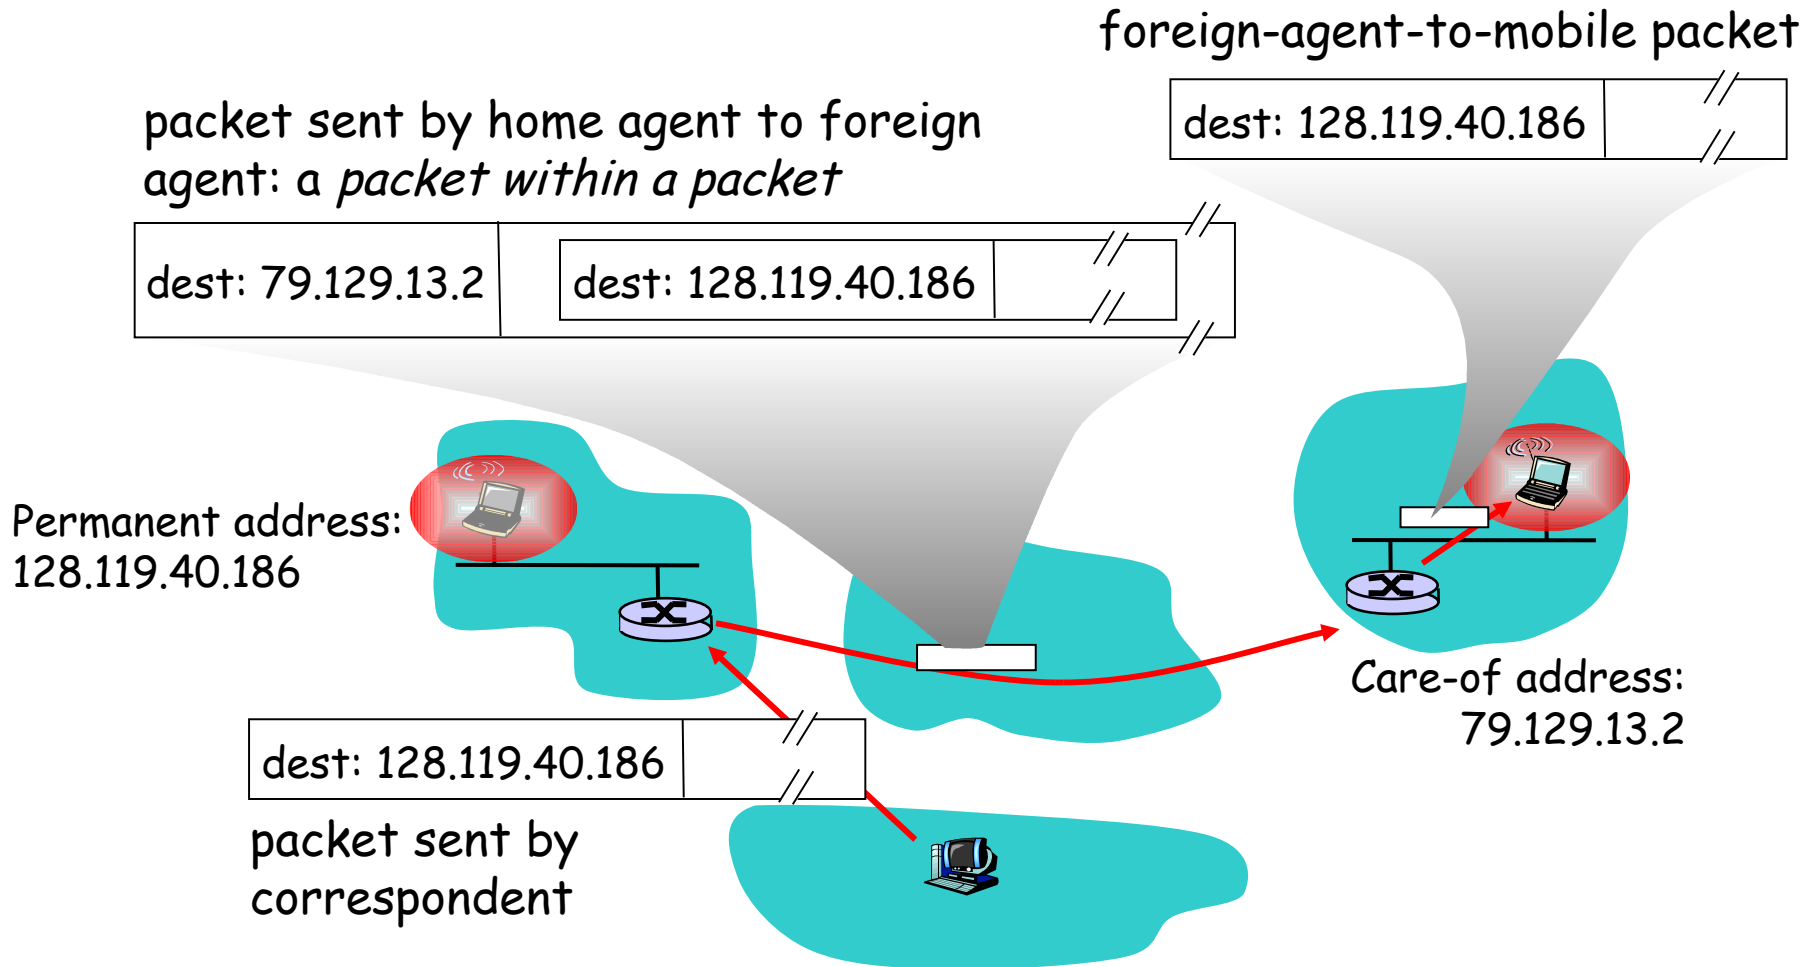


Mobile IP: agent discovery

agent advertisement: foreign/home agents advertise service by broadcasting ICMP messages (typefield = 9)

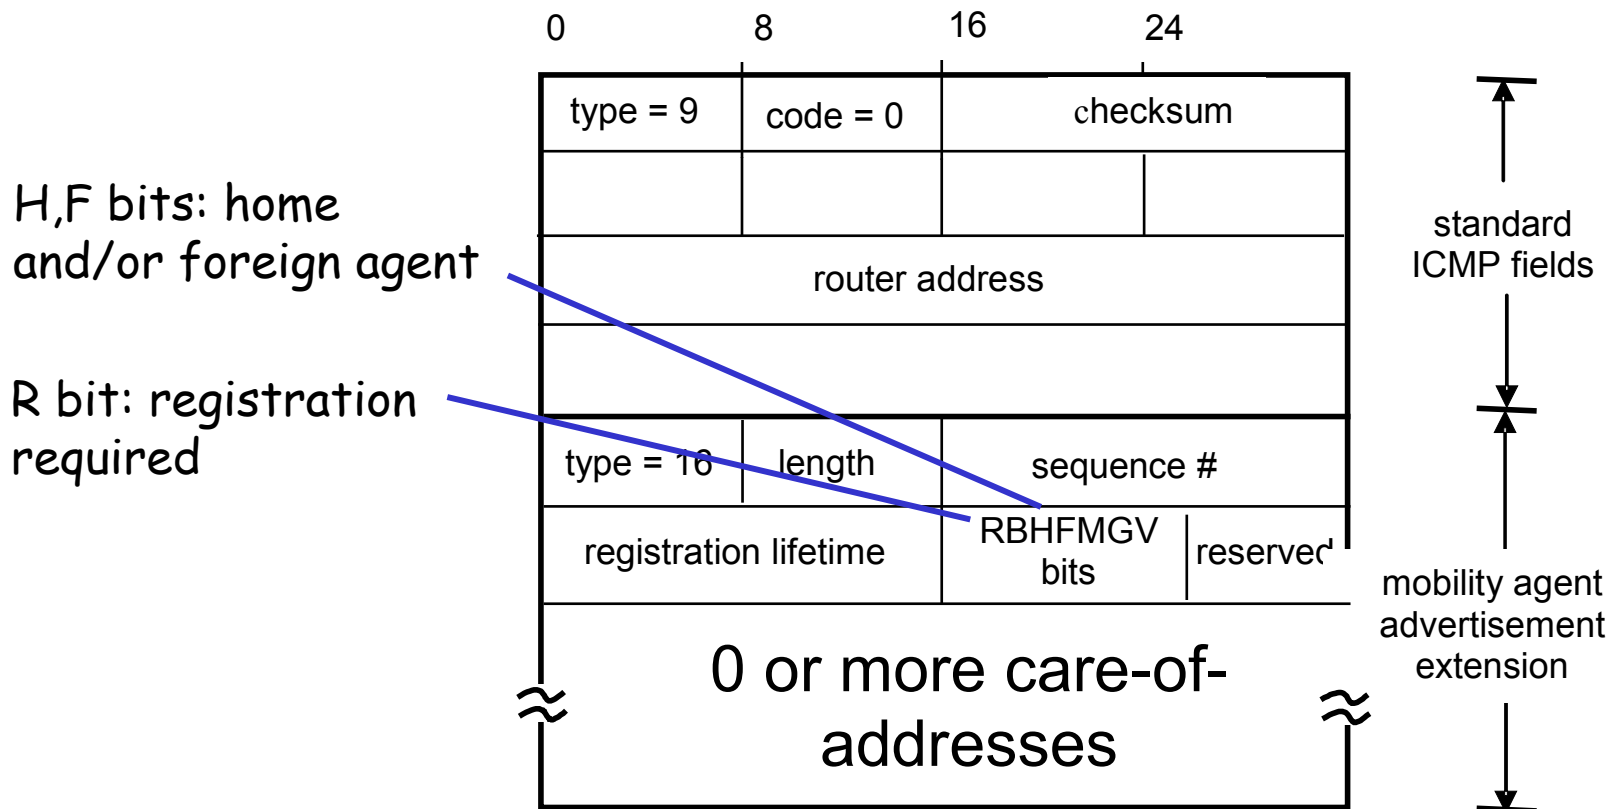


Mobile IP: registration example

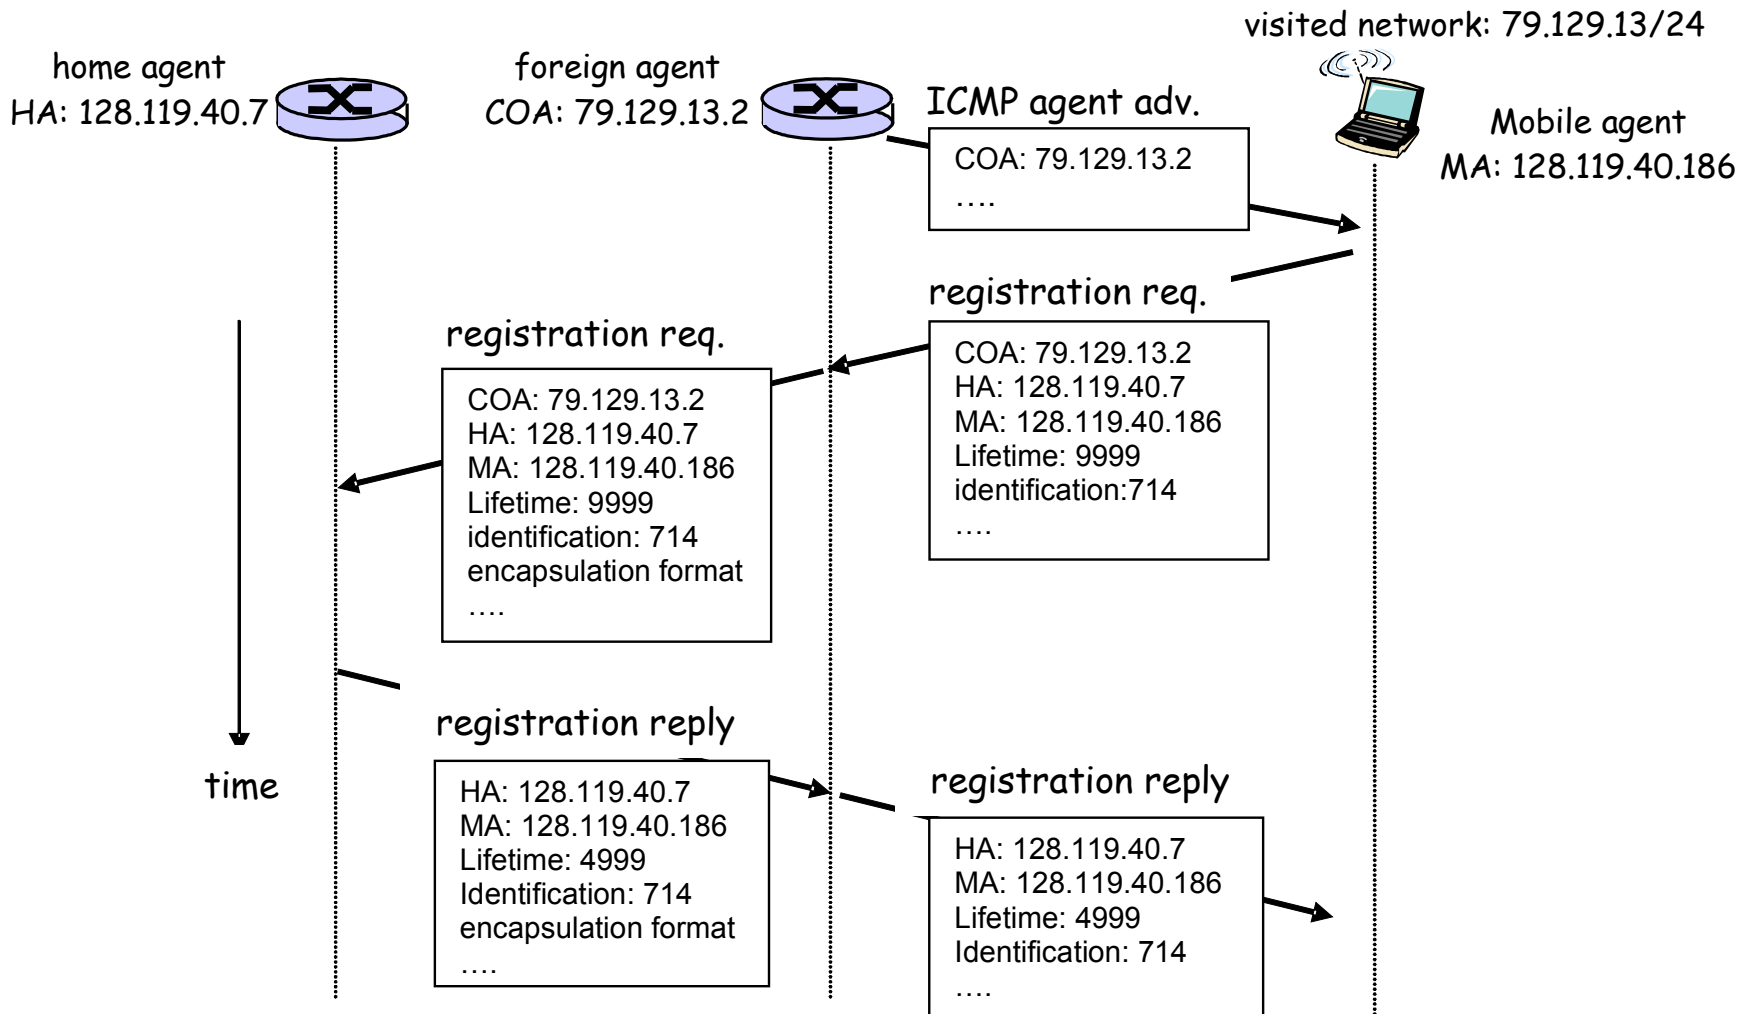

Components of cellular network architecture

recall:

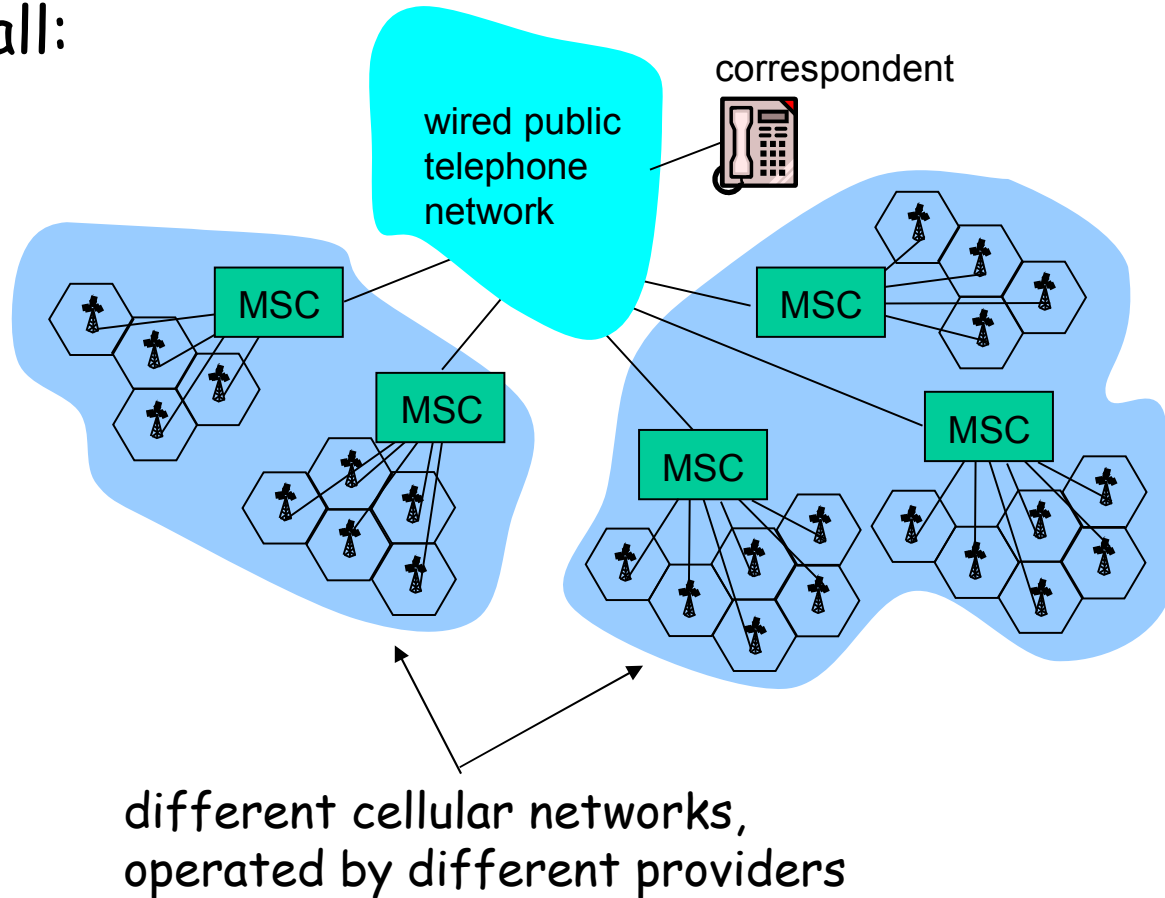

Handling mobility in cellular networks


home network: network of cellular provider you subscribe to (e.g., Sprint PCS, Verizon)

home location register (HLR): database in home network containing permanent cell phone #, profile information (services, preferences, billing), information about current location (could be in another network)


visited network: network in which mobile currently resides

visitor location register (VLR): database with entry for each user currently in network
could be home network

GSM: indirect routing to mobile

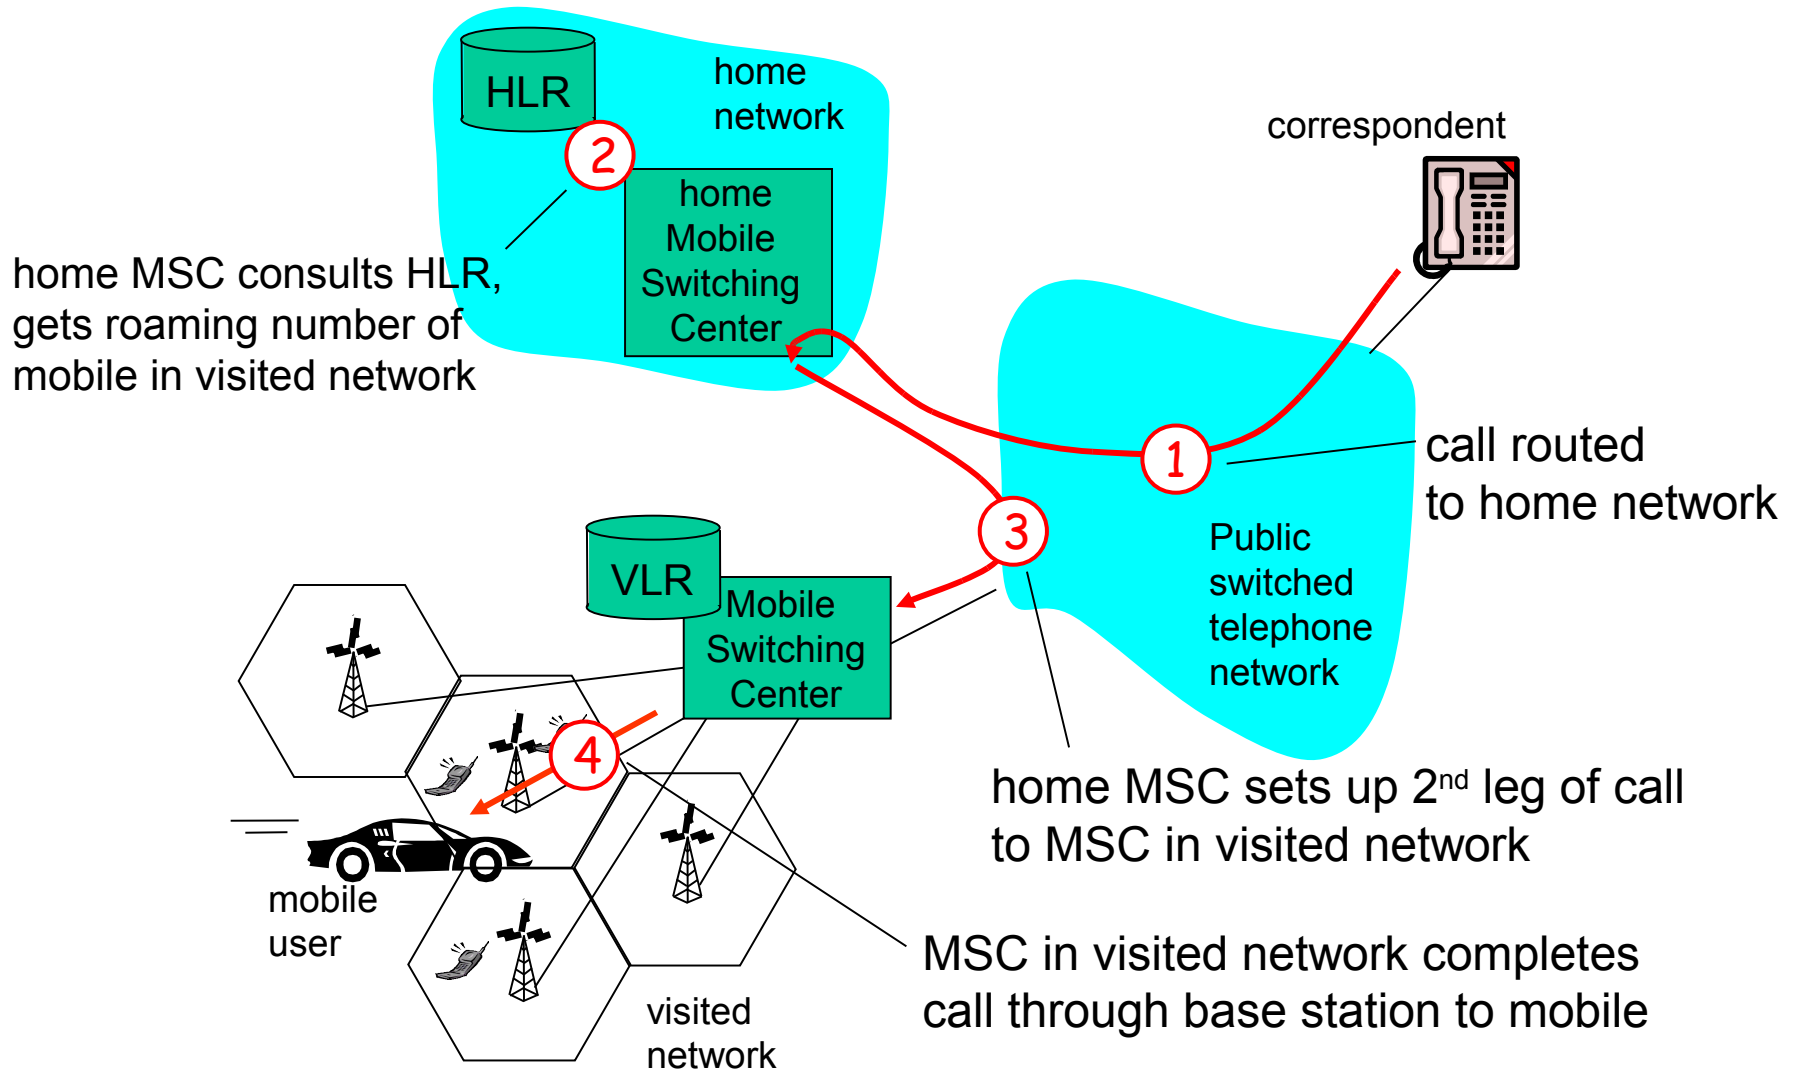

GSM: handoff with common MSC

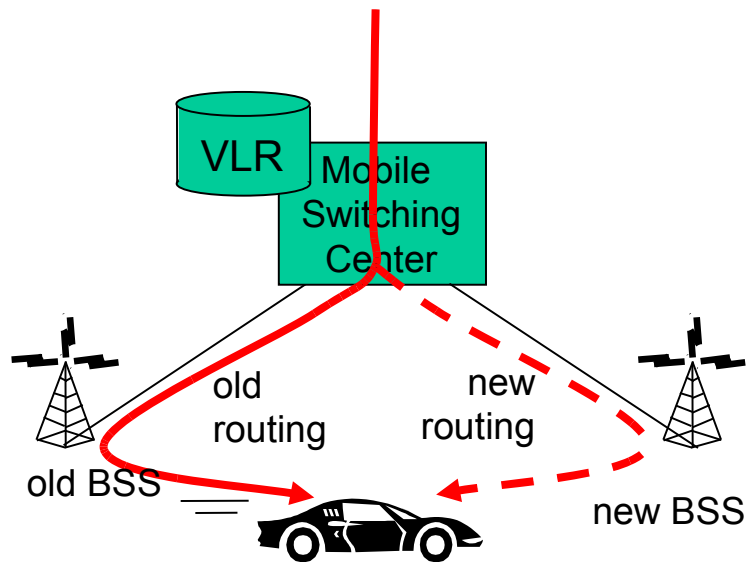

Handoff goal: route call via new base station (without interruption)

reasons for handoff:


stronger signal to/from new BSS (continuing connectivity, less battery drain)

load balance: free up channel in current BSS

GSM doesn't mandate why to perform handoff (policy), only how (mechanism)


handoff initiated by old BSS

GSM: handoff with common MSC

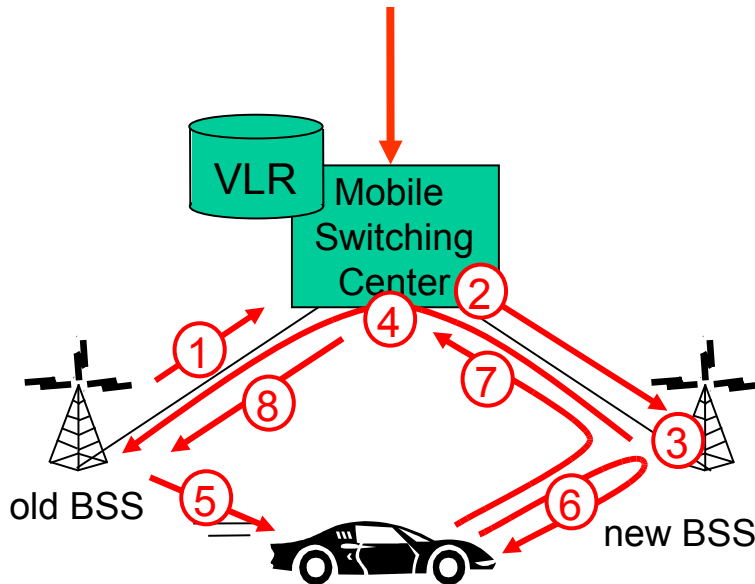

1. old BSS informs MSC of impending handoff, provides list of 1+ new BSSs
2. MSC sets up path (allocates resources) to new BSS
3. new BSS allocates radio channel for use by mobile
4. new BSS signals MSC, old BSS: ready
5. old BSS tells mobile: perform handoff to new BSS
6. mobile, new BSS signal to activate new channel
7. mobile signals via new BSS to MSC: handoff complete. MSC reroutes call
8. MSC-old-BSS resources released

GSM: handoff between MSCs

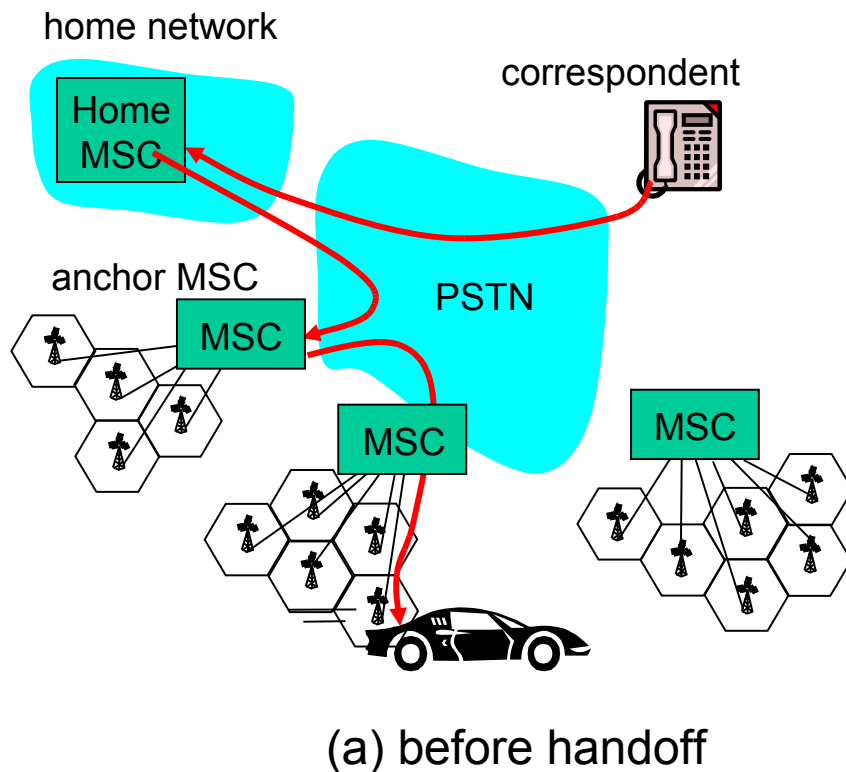


anchor MSC: first MSC visited during call

call remains routed through anchor MSC

new MSCs add on to end of MSC chain as mobile moves to new MSC

IS-41 allows optional path minimization step to shorten multi-MSC chain

GSM: handoff between MSCs

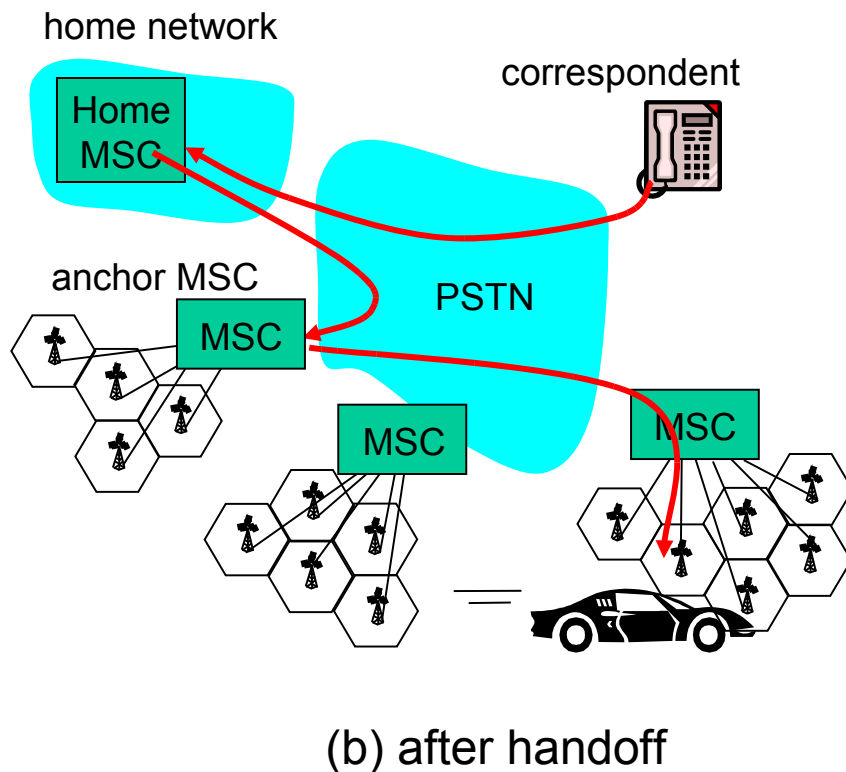

anchor MSC: first MSC visited during call

call remains routed through anchor MSC

new MSCs add on to end of MSC chain as mobile moves to new MSC

IS-41 allows optional path minimization step to shorten multi-MSC chain

Mobility: GSM versus Mobile IP

GSM element	Comment on GSM element	Mobile IP element
Home system	Network to which mobile user's permanent phone number belongs	Home network
Gateway Mobile Switching Center, or "home MSC". Home Location Register (HLR)	Home MSC: point of contact to obtain routable address of mobile user. HLR: database in home system containing permanent phone number, profile information, current location of mobile user, subscription information	Home agent
Visited System	Network other than home system where mobile user is currently residing	Visited network
Visited Mobile services Switching Center. Visitor Location Record (VLR)	Visited MSC: responsible for setting up calls to/from mobile nodes in cells associated with MSC. VLR: temporary database entry in visited system, containing subscription information for each visiting mobile user	Foreign agent
Mobile Station Roaming Number (MSRN), or "roaming number"	Routable address for telephone call segment between home MSC and visited MSC, visible to neither the mobile nor the correspondent.	Care-of-address

Wireless, mobility: impact on higher layer protocols

logically, impact *should* be minimal ...

- best effort service model remains unchanged

- TCP and UDP can (and do) run over wireless, mobile

... but performance-wise:

- packet loss/delay due to bit-errors (discarded packets, delays for link-layer retransmissions), and handoff

- TCP interprets loss as congestion, will decrease congestion window un-necessarily

- delay impairments for real-time traffic

- limited bandwidth of wireless links

Summary

Wireless

wireless links:

- capacity, distance
- channel impairments
- CDMA

IEEE 802.11 ("wi-fi")

- CSMA/CA reflects wireless channel characteristics

cellular access

- architecture
- standards (e.g., GSM, CDMA-2000, UMTS)

Mobility

principles: addressing, routing to mobile users

- home, visited networks
- direct, indirect routing
- care-of-addresses

case studies

- mobile IP
- mobility in GSM

impact on higher-layer protocols